Order From Dick Jones Sales, Inc. 258 Baltimore St. PO Box 141 Hanover, PA 17331 Phone 800-441-9955 Fax 800-253-4036 dickjones@dickjonessales.com

INDUSTRIAL/COMMERCIAL CARTS & DOLLIES SUPPLEMENT 112



STOCKPICKER TRUCKS



PLATFORM TRUCKS



HAND TRUCKS



FLOOR LOCKS



DOLLIES



PANEL CARTS

Ergo-Handle Carts	J2
Stockpicker Trucks	J3
Service Carts	J4-J6
Platform Trucks	J6-J12
Landscape/Agriculture Carts	J10
Panel Carts	J13-J16
A-Frame Carts	
Security Trucks	J17-J18
Hand Trucks	
Industrial Casters	J25
Trailer Movers	J26
Powered Carts	J27-J28
Dollies	J28-J34
Specialty Carts	J35
Machinery Lifts	J36
Machine Rollers & Skates	J37
Jacks & Floor Locks	J38-J39










model DH-PH4-2436-D





BALL VALVE

Ergo-Handle Carts

The Ergo-Handle Cart are constructed of heavy-duty steel to handle uniform loads up to 4,000 pounds. The patented ergonomic chrome plated handle decreases fatigue by allowing the operator to easily maneuver the cart. It can be inverted for individual height comfort and handling of long loads. Rolls on 8" x 2" casters, two (2) rigid and two (2) swivel with roller bearings. Many caster styles to choose from.

MODEL NUMBER	PLATFORM Size (W x L)	SHELF CLEARANCE	TOP SHELF Height	UNIFORM Capacity	NET WT. (POUND)
8" x 2" GLASS-FILLE	D-NYLON CASTERS				,
2-SHELF UNITS					
DH-PH4-2436	24" x 36"	221/2"	36 ³ /16"	4,000 lb.	220
DH-PH4-2448	24" x 48"	221/2"	36 ³ /16"	4,000 lb.	233
DH-PH4-2460	24" x 60"	221/2"	36 ³ /16"	4,000 lb.	275
DH-PH4-2472	24" x 72"	221/2"	36 ³ /16"	4,000 lb.	280
DH-PH4-3448	34" x 48"	221/2"	36 ³ / ₁₆ "	4,000 lb.	287
DH-PH4-3460	34" x 60"	221/2"	36 ³ /16"	4,000 lb.	316
DH-PH4-3472	34" x 72"	221/2"	36 ³ /16"	4,000 lb.	339
3-SHELF UNITS					
DH-PH4-2436-3	24" x 36"	10¼"	36 ³ /16"	4,000 lb.	230
DH-PH4-2448-3	24" x 48"	10¼"	36 ³ /16"	4,000 lb.	286

MODEL NUMBER 8" x 2" POLYURETHA	PLATFORM Size (W x L)	SHELF Clearance	TOP SHELF Height	UNIFORM Capacity	NET WT. (POUND)
2-SHELF UNITS					
DH-PU2.4-2436	24" x 36"	22"	36¼"	4,000 lb.	202
DH-PU2.4-2448	24" x 48"	22"	36¼"	4,000 lb.	216
DH-PU2.4-3060	30" x 60"	22"	36¼"	4,000 lb.	298

MODEL NUMBER	PLATFORM Size (W x L)	SHELF CLEARANCE	TOP SHELF Height	UNIFORM Capacity	NET WT. (POUND)
8" x 2" MOLD-ON-RU	BBER CASTERS				
2-SHELF UNITS					
DH-MR2-2436	24" x 36"	22"	36¼"	2,400 lb.	225
DH-MR2-2448®	24" x 48"	22"	36¼"	2,400 lb.	229
DH-MR2-3060	30" x 60"	22"	36¼"	2,400 lb.	295

MODEL NUMBER	DESCRIPTION	UNIFORM Capacity	SIZE (W x L)	LIP HEIGHT	NET WT. (POUND)
DHPH-1236-UTS	UTILITY SHELF	150 lb.	12" x 36"	2"	42
DHPH-1248-UTS	UTILITY SHELF	150 lb.	12" x 48"	2"	52
DHPH-1260-UTS	UTILITY SHELF	150 lb.	12" x 60"	2"	62
DHPH-1272-UTS	UTILITY SHELF	150 lb.	12" x 72"	2"	75

OPTIONAL FLOOR LOCK, model ERGO-FL,



Ergo-Handle Carts with Drain

The Ergo-Handle Carts with Drain have the patented chrome plated ergonomic handle that decreases fatigue by allowing the operator to easily maneuver the cart. The chrome plated ergonomic handle has an invertible bolt-on design that is great for individual height comfort and handling. The top shelf has a perimeter retaining edge that is slightly slanted towards the drain hole that consists of screen plug. To use the drain system, simply turn the ball valve to empty liquid into container of your choice. Each unit rolls on two (2) rigid and two (2) swivel casters.

MODEL NUMBER	PLATFORM Size (W x L)	SHELF Clearance	TOP SHELF Height	UNIFORM Capacity	NET WT. (POUND)
8" x 2" PHENOLIC CAS	TERS				
DH-PH4-2436-D	24" x 36"	22"	36¼"	4,000 lb.	207
DH-PH4-2448-D	24" x 48"	22"	36¼"	4,000 lb.	233
8" x 2" POLY-ON-STEE	L CASTERS				
DH-PU2.4-2436-D	24" x 36"	22"	36¼"	4,000 lb.	202
DH-PU2.4-2448-D	24" x 48"	22"	36¼"	4,000 lb.	218
ERGO-FL	OPTIONAL M	ANUAL FOOT-O	PERATED FLOO	R LOCK	6



INDUSTRIAL/COMMERCIAL CARTS & DOLLIES

Stockpicker Trucks

Stockpicker Trucks combine the mobility of a cart with the versatility of a step ladder. Convenient spring loaded step ladder holds the cart securely in place while a person is standing on the ladder. The rubber tip ladder plungers down to prevent the cart from moving while stocking. Springs then return the ladder to the raised position once the person steps back on the ground. Standard shelves have a 2" lip turned up to prevent items from sliding off. Standard casters are 4" x 2" mold-on-rubber, two (2) rigid and two (2) swivel with wheel brakes. Steel units are powder coated blue.

MODEL NUMBER	BOTTOM Shelf Size (W x L)	SHELF Clearance	TOP Shelf Height	UNIFORM Capacity Per Shelf	TOTAL Uniform Capacity	NET WT. (POUND)
ALUMINUM CON	ISTRUCTION					
2-SHELF UNITS						
SPA2-2236	22" x 36"	28"	355/8"	330 lb.	660 lb.	126
SPA2-2840	28" x 40"	28"	355/8"	330 lb.	660 lb.	141
SPA2-2848	28" x 48"	28"	355/8"	330 lb.	660 lb.	175
3-SHELF UNITS						
SPA3-2236	22" x 36"	13½"	355/8"	330 lb.	1,000 lb.	134
SPA3-2840	28" x 40"	13½"	355/8"	330 lb.	1,000 lb.	146
SPA3-2848	28" x 48"	13½"	35 ⁵ /8"	330 lb.	1,000 lb.	175
STEEL CONSTRU	JCTION					
2-SHELF UNITS						
SPS2-2236	22" x 36"	28"	355/8"	550 lb.	1,000 lb.	146
SPS2-2840	28" x 40"	28"	355/8"	550 lb.	1,000 lb.	165
SPS2-2848	28" x 48"	28"	355/8"	550 lb.	1,000 lb.	225
3-SHELF UNITS						
SPS3-2236	22" x 36"	13½"	35 ⁵ /8"	550 lb.	1,000 lb.	200
SPS3-2840	28" x 40"	13½"	35 ⁵ /8"	550 lb.	1,000 lb.	224
SPS3-2848	28" x 48"	13½"	35 ⁵ /8"	550 lb.	1,000 lb.	289

OPTION LADDER AUTO-LOCK. MODEL SPS-LIPD

Steel Cantilever Stockpicker Truck

This unique cantilever design allows for oversized packages to fit conveniently on the bottom shelf without restricting access. Eliminate the need to move around a clumsy ladder and push a cart while trying to stock or unstock shelves. The step ladders are spring loaded to hold the cart securely in place while a person is standing on the ladder. Two (2) rigid and two (2) swivel 4" x 1" mold-on-rubber casters standard. Total uniform capacity is 440 pounds per cart uniformly loaded.

MODEL NUMBER	BOTTOM Shelf Size (W x L)	SHELF Clearance	TOP Shelf Height	UNIFORM Top Shelf Capacity	UNIFORM Bottom Shelf Capacity	NET WT. (POUND)
SPS2-2041-C	201⁄2" x 41 ⁵ /8"	27 ⁷ /8"	36½"	110 lb.	440 lb.	89

HI-DUTY

ALUMINUM

STOCKPICKER series SPA-HD

Hi-Duty & Hi-Frame Stockpicker Trucks

These oversized units are perfect for large jobs. Ideal for oversized cartons, boxes, parts, and supplies. A spring loaded ladder for sure, safe climbing, and loading. Steps have non-skid footing with self-cleaning surface. Each unit features three shelves. Standard 4" x 2" mold-on-rubber casters, two (2) rigid and two (2) swivel with brake. Steel or aluminum construction. Steel units are powder coated a blue finish.

MODEL NUMBER	BOTTOM Shelf Size (W x L)	SHELF Clearance	TOP Shelf Height	UNIFORM Capacity Per Shelf	TOTAL Uniform Capacity	NET WT. (POUND)
HI-DUTY STOCKPI	CKER TRUCKS					,
ALUMINUM						
SPA-HD-2252	22" x 52"	13"	35½"	330 lb.	500 lb.	156
SPA-HD-2852	28" x 52"	13"	35½"	330 lb.	500 lb.	168
STEEL						
SPS-HD-2252	22" x 52"	13"	37¾"	500 lb.	1,000 lb.	218
SPS-HD-2852	28" x 52"	13"	37¾"	500 lb.	1,000 lb.	252
HI-FRAME STOCK	PICKER TRUCK	S				
STEEL						
SPS-HF-2252	22" x 52"	27"	63½"	500 lb.	1,000 lb.	228
SPS-HF-2852	28" x 52"	27"	63½"	500 lb.	1,000 lb.	252





model PSC-1828-2

Service Carts

All welded Service Carts made of steel or aluminum are ideal for transporting parts and boxes. A 2" lip is turned up on all shelves to prevent items from sliding off. Standard 4" x 2" mold-on-rubber casters, two (2) rigid and two (2) swivel with brake. Steel units are powder coated blue.

MODEL NUMBER	BOTTOM Shelf Size (W x L)	SHELF Clearance	TOP Shelf Height	UNIFORM Capacity Per Shelf	TOTAL Uniform Capacity	NET WT. (POUND)
ALUMINUM CONST	RUCTION					
2-SHELF UNITS						
SCA2-2236	22" x 36"	231⁄2"	31 ¹ /8"	330 lb.	660 lb.	102
SCA2-2840	28" x 40"	23½"	31 ¹ /8"	330 lb.	660 lb.	106
SCA2-2848	28" x 48"	231⁄2"	31 ¹ /8"	330 lb.	660 lb.	114
3-SHELF UNITS						
SCA3-2236	22" x 36"	15"	31 ¹ /8"	330 lb.	660 lb.	124
SCA3-2840	28" x 40"	15"	31 ¹ /8"	330 lb.	660 lb.	128
SCA3-2848	28" x 48"	15"	31 ¹ /8"	330 lb.	660 lb.	136
STEEL CONSTRUCT	ION					
2-SHELF UNITS						
SCS2-2236	22" x 36"	231⁄2"	395/8"	550 lb.	1,000 lb.	151
SCS2-2840	28" x 40"	231⁄2"	395/8"	550 lb.	1,000 lb.	155
SCS2-2848	28" x 48"	231⁄2"	395/8"	550 lb.	1,000 lb.	158
3-SHELF UNITS						
SCS3-2236	22" x 36"	15"	395/8"	550 lb.	1,000 lb.	180
SCS3-2840	28" x 40"	15"	395/8"	550 lb.	1,000 lb.	219
SCS3-2848	28" x 48"	15"	395/8"	550 lb.	1,000 lb.	238

LIP DOWN ON TOP SELF, MODEL SPS-LIPD

Two-Tier Steel Service Cart

Two-Tier Steel Service Cart has a capacity of 1,100 lbs. per shelf and a total weight capacity of 2,200 lbs. Unit rolls smoothly on two (2) rigid and two (2) swivel 5" x 2" non-marking polyurethane casters. Steel construction. Ships knock-down.

MODEL	DECK SIZE	TOP SHELF	LOWER SHELF	HANDLE	UNIFORM STATIC	NET WT.
NUMBER	(W x L)	HEIGHT	HEIGHT	Height	Capacity	(POUND)
STC-1835®	18" x 35"	32½"	81⁄2"	38"	2,200 lb.	71

Easy-Access Steel Stock Trucks

Unique two shelf design features three support legs to allow for easier access to bottom shelf. Attractive chrome plated ergonomic push handles are ideal for users of various heights. Two (2) rigid and two (2) locking swivel ball bearing poly casters 5" x 1¼" are standard. Mount swivel casters to the front of cart for lighter applications and to the rear for heavier applications. Optional bolt-on writing surface with hinged top for access to lockable storage box to hold supplies. The optional basket is ideal for extra carrying capacity. Fold-out design simplifies assembly. Ships knockdown. Assembly required. Steel construction.

MODEL NUMBER	DECK SIZE (W x L)	CAPACITY PER SHELF	UNIFORM STATIC Capacity	OVERALL SIZE (W x L x H)	NET WT. (POUND)	
EASY-A-1836®	18" x 36"	660	1,200 lb.	18½" x 42 ³ /8" x 36"	82	
EASY-A-2436®	24" x 36"	660	1,200 lb.	24" x 41½" x 36"	96	
EASY-A-2448®	24" x 48"	660	1,200 lb.	24" x 53½" x 36"	111	
EASY-A-WT®	Optional Writing Table/Storage Box (Size 13"W x 11"D x 9½"H)					
EASY-A-BSK®	Optional Wire	Storage Bask	et		4	

Two & Three Shelf Plastic Platform Carts

Transport loads from workstation to workstation with these lightweight but strong polyurethane Platform Carts. Available in either two or three shelf design. Ideal for shipping and receiving areas, maintenance departments, and general warehouse use. Handle height is 36¼". Uniform static capacity is 500 pounds. Rolls on four (4) swivel 4" x 1¼" rubber casters. Ships knockdown.

MODEL NUMBER	DECK SIZE (W x L)	TOP DECK HEIGHT	MIDDLE DECK HEIGHT	LOWER DECK HEIGHT	NUMBER OF SHELVES	NET WT. (POUND)
PSC-1828-2®	18" x 28"	29"		5¾"	2	30
PSC-1828-3®	18" x 28"	29"	17½"	5¾"	3	32

J4

Double & Triple Decker Hardwood Platform Carts Minimize lifting and bending with this cart/portable work bench. Ideal for shipping areas, offices, and plant use, these economical carts are perfect for many of your applications, including protecting products with metallic surfaces. Constructed of 7/8" thick hardwood platform and removable chrome plated push handle. 6" x 2" mold-on-rubber casters, two (2) rigid and two (2)


swivel. Countersunk holes allow for a smooth deck surface. Ships knockdown.

MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC Capacity	DECK HEIGHT	NUMBER OF Shelves	NET WT. (POUND)
DOUBLE DECKER					
VHPT/D-2448®	24" x 48"	1,600 lb.	9¼" / 22"	2	186
VHPT/D-2754®	27" x 54"	1,600 lb.	9¼" / 22"	2	190
VHPT/D-3060®	30" x 60"	1,600 lb.	9¼" / 22"	2	207
VHPT/D-3672®	36" x 72"	1,600 lb.	9¼" / 22"	2	277
TRIPLE DECKER					
VHPT/TD-2448 [®]	24" x 48"	1,600 lb.	9¼" / 22" / 42¼"	3	226
VHPT/TD-2754®	27" x 54"	1,600 lb.	9¼" / 22" / 42¼"	3	270
VHPT/TD-3060	30" x 60"	1,600 lb.	9¼" / 22" / 42¼"	3	313
VHPT/TD-3672®	36" x 72"	1,600 lb.	9¼" / 22" / 42¼"	3	363

Plastic Utility Service Carts

Constructed from durable, yet lightweight structural foam plastic. Choose either two or three shelf design to accommodate your application. Deep 4" high lips prevent parts from rolling off. Ideal for mail rooms, shipping docks, grocery stores, warehouses, and inventory rooms. Includes two (2) rigid and two (2) swivel casters. Ships knockdown assembly required.

MODEL NUMBER	DECK SIZE (W x L)	SHELF Capacity	UNIFORM STATIC Capacity	NUMBER OF SHELVES	NET WT. (POUND)
PLSC-2-1731®	17½" x 31"	275 lb.	550 lb.	2	40
PLSC-3-1731®	17½" x 31"	183 lb.	550 lb.	3	58
PLSC-2-2436®	24½" x 36"	275 lb.	550 lb.	2	55
PLSC-3-2436®	24½" x 36"	183 lb.	550 lb.	3	73







model CSC-P

48 Hours Ito Ship

model CSC-S

model CSC-RB

48 Hours (-----)to Ship

Commercial Service Carts

The Commercial Service Carts are ideal for the hospitality industry. The secure grip handles on the strong, yet lightweight frame makes for easy maneuverability. The low noise thermoplastic casters make transportation as quiet as possible. The three paneled construction protects material from outside harm as well as accidental falling. Additionally, the semi-textured surface with perimeter lip prevents sliding of products while still being easily cleanable. Total uniform capacity is 500 pounds. Shelf capacity is 250 pounds.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	NET WT. (POUND)
CSC-P®	3 SHELF / 3 SIDE PANELS	43 ³ /8" x 20 ¹ /2" x 40 ¹ /8"	44
CSC-S⊛	3 SHELF / OPEN SIDED	33½" x 19" x 39½"	25
CSC-L℗	3 SHELF / OPEN SIDED	43¼" x 20½" x 40½"	36
CSC-DD⊛	3 SHELF / DOORS / DRAWER	33½" x 19" x 39½"	53
CSC-2D®	2 SHELF / 2 SIDE PANELS	33½" x 19" x 37½"	48
CSC-RB®	REFUSE BIN WASTE	13¾" x 9½" x 18½"	3
CSC-UB®	UTILITY BOX	21¾" x 15½" x 7"	3







model CSC-DD

model CSC-2D

model CSC-UB

CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

J5

model VHPT/D-2448

48 Hours









Two file folder hanger runner

48 Hours

model CTPT-1844-CK

model ASD-3060



hanger runners included



48 Hours

to Ship



CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

Electrician Cart

The Electrician Cart is ideal for maintenance and repair facilities. The unit is designed to transport the materials needed for restoring and installing electrical fixtures. The cart is constructed of steel for strength and durability in rough conditions. Casters enable the cart to roll smoothly when travelling from workstation to workstation. An extended chrome plated handle allows for ergonomic friendly maneuvering when transporting.

MODEL	DECK SIZE	SHELF	TOP SHELF	UNIFORM	NET WT.
NUMBER	(W x L)	Clearance	Height	Capacity	(POUND)
ELEC-2448-2	24" x 48"	6"	36 ³ /16"	1,000 lb.	160

Double Tray/Double Basket Mail Cart

Quickly transport office mail and small package delivery throughout your office and warehouse. Two removable, lift-out baskets make delivery, collection, and filing of materials easy and convenient. Comes with two file folder hanger runners that can be adjusted for letter or legal size hanging files. Excellent mobility on four (4) 4" x 1¼" swivel casters with rear brakes. Uniform static capacity is 200 pounds. Steel construction. Easy assembly.

MODEL	OVERALL SIZE	SHELF HEIGHT	BASKET SIZE	NET WT.
NUMBER	(W x L x H)	W/O BASKETS	(W x L x H)	(POUND)
MAIL-55®	18" x 31" x 39"	11" / 33"	17½" x 20" x 10"	

Portable Carton Carts

Portable Carton Carts are designed to store, organize, and transport your empty cardboard boxes. Chrome plated uprights and frame dividers with powder coated black shelves. Uniform capacity is 400 pounds. Four (4) 5" x 1¼" poly-on-poly swivel casters for easy maneuverability are standard. Ships knockdown. Model CTC-1856-B features two (2) adjustable-height shelves with adjustable box dividers ideal for small boxes. Model CTPT-1844-CK has adjustable box dividers ideal for oversized boxes.

MODEL NUMBER	OVERALL SIZE (D x L x H)	NUMBER OF DIVIDERS	DISTANCE BETWEEN DIVIDERS	NET WT. (POUND)
CTC-1856-B®	18" x 56" x 50"	7	4"	153
CTPT-1844-CK®	18" x 44" x 30"	5	17"W x 22"H	64

Aluminum Sheet Deck Platform Trucks

Tough, but lightweight, this truck is made of smooth aluminum for durability. Includes one removable chrome plated steel handle. Two (2) rigid and two (2) swivel 5" x 2" poly-on-steel casters are standard. Ideal for commercial, industrial, and warehouse areas.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER TYPE	NET WT. (POUND)
ASD-2448	24" x 48"	10"	3,600 lb.	POLY-ON-STEEL	108
ASD-2460	24" x 60"	10"	3,600 lb.	POLY-ON-STEEL	113
ASD-3048	30" x 48"	10"	3,600 lb.	POLY-ON-STEEL	118
ASD-3060	30" x 60"	10"	3,600 lb.	POLY-ON-STEEL	123
ASD-3672	36" x 72"	10"	3,600 lb.	POLY-ON-STEEL	143

HANDLE DESIGN MAY VARY FROM WHAT IS SHOWN

Aluminum Channel Platform Trucks

Rugged dependable service at an economical price. Extruded deck sections are engineered for high load capacity, durability, and shock resistance. All aluminum construction. Includes one removable chrome plated steel handle and two (2) rigid and two (2) swivel 5" x 2" poly-on-steel casters. Ideal for commercial, industrial, and warehouse areas.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER TYPE	NET WT. (POUND)
SDD-2448	24" x 48"	10½"	3,600 lb.	POLY-ON-STEEL	54
SDD-3048	30" x 48"	10½"	3,600 lb.	POLY-ON-STEEL	57
SDD-3060	30" x 60"	10½"	3,600 lb.	POLY-ON-STEEL	139
SDD-3672	36" x 72"	10½"	3,600 lb.	POLY-ON-STEEL	162
HANDLE DESIGN	MAY VARY FROM WH	AT IS SHOWN			

Heavy duty, extra strong, corrosion resistant platform trucks are ideal for handling all types of materials. Non-slip 5 bar aluminum tread plate. Box style frame is made of high strength welded aluminum channel. Removable aluminum handle can be placed on both or either end of the platform truck. Single or double aluminum handles available. Ergonomically designed to reduce the chance of injury, fatigue and muscle strain. Fitted with non-marking rubber protective buffer strip to protect walls and door frames during transit. Two (2) swivel and two (2) rigid 6" x 1⁵/₈" poly-on-poly casters. Ideal for supermarkets, food industry, schools and warehouses.

Heavy Duty Aluminum Treadplate Platform Trucks

MODEL	DECK SIZE	DECK	UNIFORM		NET WT.
NUMBER	(W x L)	HEIGHT	CAPACITY	CASTER TYPE	(POUND)
SINGLE HANDLE					
ATP-C-2436®	24" x 36"	10¼"	3,600 lb.	POLY-ON-POLY	48
ATP-C-2448®	24" x 48"	10¼"	3,600 lb.	POLY-ON-POLY	53
ATP-C-2460®	24" x 60"	10¼"	3,600 lb.	POLY-ON-POLY	58
ATP-C-3048®	30" x 48"	10¼"	3,600 lb.	POLY-ON-POLY	58
ATP-C-3060®	30" x 60"	10¼"	3,600 lb.	POLY-ON-POLY	62
ATP-C-3672®	36" x 72"	10¼"	3,600 lb.	POLY-ON-POLY	73
DUAL HANDLE					
ATP-C-2436-2HDL®	24" x 36"	10¼"	3,600 lb.	POLY-ON-POLY	58
ATP-C-2448-2HDL®	24" x 48"	10¼"	3,600 lb.	POLY-ON-POLY	63
ATP-C-2460-2HDL®	24" x 60"	10¼"	3,600 lb.	POLY-ON-POLY	68
ATP-C-3048-2HDL®	30" x 48"	10¼"	3,600 lb.	POLY-ON-POLY	69
ATP-C-3060-2HDL®	30" x 60"	10¼"	3,600 lb.	POLY-ON-POLY	73
ATP-C-3672-2HDL®	36" x 72"	10¼"	3,600 lb.	POLY-ON-POLY	85

Heavy-Duty Extruded Aluminum Platform Trucks

These all welded aluminum trucks are built to handle your heaviest loads. Includes one removable chrome plated steel handle, additional handle available. Rolls smoothly on two (2) rigid and two (2) swivel 8" x 2" phenolic casters. Ideal for industrial and warehouse areas.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER TYPE	NET WT. (POUND)
EFHD-2448	24" x 48"	10¾"	4,800 lb.	GFN*	145
EFHD-3048	30" x 48"	10¾"	4,800 lb.	GFN*	152
EFHD-3060	30" x 60"	10¾"	4,800 lb.	GFN*	176
EFHD-3672	36" x 72"	10¾"	4,800 lb.	GFN*	190

HANDLE DESIGN MAY VARY FROM WHAT IS SHOWN

*GLASS-FILLED NYLON

Fold-Up Aluminum Platform Truck

Telescoping aluminum frame has dual length platform; 25" extended and 16½" retracted. Easy steering with 4" x 1" hard rubber casters, two (2) rigid and two (2) swivel. Folded dimensions are 16"W x 20"L allowing the truck to fit into tight spaces for storage. Handle height is $33\frac{1}{2}$ " extended and $26\frac{1}{2}$ " retracted. Ideal for delivery, repair personnel, frequent travelers and salespeople.

MODEL	OVERALL	DECK	UNIFORM STATIC	CASTER TYPE	NET WT.
NUMBER	SIZE (W x L)	Height	Capacity		(POUND)
FAPT-1628®	16" x 28"	6½"	300 lb.	HARD RUBBER	18

Aluminum Folding Handle Platform Trucks

For safe transportation of stacks of paper, small parts, and other lightweight products. Ideal for maintenance rooms, offices, schools, hospitals, etc. Plastic corner protectors enhance durability and protect surroundings. Rugged aluminum construction with single or dual folding handle design. Units roll smoothly on non-marking polyurethane casters.

MODEL NUMBER	HANDLE Type	DECK SIZE (W x L x H)	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
AFT-30-NM®	SINGLE	18½" x 30" x 6¾"	400 lb.	4"	26
AFT-36-NM®	SINGLE	24" x 36" x 7 ³ /8"	600 lb.	5"	36
AFT-48-NM®	SINGLE	24" x 48" x 7 ³ /8"	600 lb.	5"	38
AFT-60-NM®	DUAL	24" x 60" x 7 ³ /8"	800 lb.	5"	57







model SPT-3060



model ECSPT-2448



High quality Stainless Steel Platform Trucks highly suited for clean room environments, applications with food handling, and pharmaceutical industry. Completely formed from 201 grade stainless steel sheet and tube. Corrosion resistant, non-wearing, temperature resistant, completely hygienic stainless steel roller bearings. 100% stainless steel platform trucks.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER TYPE	NET WT. (Pound)
SSPT-2436	24" x 36"	91⁄2"	2,000 lb.	POLY-ON-POLY	55
SSPT-2448	24" x 48"	91⁄2"	2,000 lb.	POLY-ON-POLY	64
SSPT-3048	30" x 48"	9½"	2,000 lb.	POLY-ON-POLY	70
SSPT-3060	30" x 60"	91⁄2"	2,000 lb.	POLY-ON-POLY	81
SSPT-3672	36" x 72"	91⁄2"	2,000 lb.	POLY-ON-POLY	100

Steel Platform Trucks

Solid, smooth steel deck is all welded and features structural reinforcement underneath for extra strength. Includes one removable steel handle and rolls smoothly on two (2) rigid and two (2) swivel casters. Series SPT comes standard with a floor lock, chrome plated handle, and a durable blue powder coat finish.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER Size / Type	NET WT. (POUND)
STEEL PLATFORM 1	RUCKS				
SPT-2448	24" x 48"	12¼"	3,600 lb.	8" x 2" GFN*	153
SPT-3060	30" x 60"	12¼"	3,600 lb.	8" x 2" GFN*	199
SPT-3672	36" x 72"	12¼"	3,600 lb.	8" x 2" GFN*	232
ECSPT-2448	24" x 48"	11 ⁷ /8"	2,000 lb.	6" x 2" RUBBER	125
STEEL PLATFORM 1	RUCKS WITH SCA	13			
SPT-2448-SCL	24" x 48"	15"	3,600 lb.	8" x 2" GFN*	228
SPT-3060-SCL	30" x 60"	15"	3,600 lb.	8" x 2" GFN*	227
SPT-3672-SCL	36" x 72"	15"	3,600 lb.	8" x 2" GFN*	329
WRITING TABLE					
WT-TBL	WRITING TAB	LE measures 1	01⁄2"W x 13"H with a 1'	' lip	7

WT-TBL WRITING TABLE measures 10½"W x 13"H with a 1" lip GLASS-FILLED NYLON



CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

model WT-TBL

Semi-Live Steel Skids & Lever Jack

Transport large items easily with our Semi-Live Steel Skids and Lever Jacks. The unit is constructed of a powder coated 12 gauge thick steel platform with two (2) rigid 6" x 2" mold-on-rubber casters for smooth portability. The platform has a 2" lip around perimeter. The front of the unit includes attached legs which create stability once unit is in the level position. The optional lever jack allows the unit to be pulled while still maintaining an ergonomic position. Handle measures 58" long.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	NET WT. (POUND)	
SPL-SL-24	24" x 48"	11 ⁵ /8"	1,600 lb.	98	
SPL-SL-30	30" x 60"	11 ⁵ /8"	1,600 lb.	128	
SPL-SL-36	36" x 72"	11 ⁵ /8"	1,600 lb.	142	
SPL-SL-JACK	S	SEMI-LIVE LEVER JACK			

Pneumatic Tire Steel Platform Trucks

Travel over rough terrain with these Pneumatic Tire Steel Platform Trucks. Ideal for nurseries, farms, and warehouses. Units have 12" x 4" two (2) swivel and two (2) rigid tires and a removable chrome plated handle. Durable blue powder coat finish standard.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER TYPE	NET WT. (POUND)
PNU-2448	24" x 48"	18¼"	1,500 lb.	PNEUMATIC	170
PNU-3060	30" x 60"	18¼"	1,500 lb.	PNEUMATIC	211
PNU-3672	36" x 72"	18¼"	1,500 lb.	PNEUMATIC	249







model SFT-1929

Flat Bed Cart

Heavy duty steel platform cart provides long term service. Removable handle. Rolls on four (4) 5" swivel and two (2) 8" poly rigid casters. Center caster provides great maneuverability. Ideal for industrial, commercial, and warehouse use.

MODEL	OVERALL SIZE	UNIFORM STATIC	CASTER TYPE	NET WT.
NUMBER	(W x L x H)	Capacity		(Pound)
FLAT-C®	30" x 60" x 11¾"	2,000 lb.	POLYURETHANE	162

Steel Folding Handle Platform Truck

Steel platform truck includes a fold-down handle for convenient storage. Handle includes unique fold-up storage pocket for tools, picking slips, or whatever the application requires. Platform features rubber edge guards and a non-slip rubber surface. Trucks roll smoothly on two (2) rigid and two (2) swivel 4" casters. Steel construction with a painted finish.

MODEL	DECK SIZE	DECK	HANDLE	UNIFORM	NET WT.
NUMBER	(W x L)	HEIGHT	HEIGHT	Capacity	(POUND)
SFT-1929®	19" x 29"	5¾"	27"	330 lb.	20

Nesting Platform Cart

This steel platform truck is nestable to save valuable warehouse storage space. Ideal for warehouses, shipping and receiving areas, lumber retailers, mail rooms, and other places where multiple platform trucks are needed. The first cart requires a 30"W x 48"L floor space - each additional truck only adds 12" to the length. Durable powder coat finish with chrome plated handle.

MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC Capacity	CASTER	CASTER TYPE	NET WT. (POUND)
NUIVIDEN	(WXL)	GAPAGITT	SIZE	GASIENTIFE	
NPCT ®	24" x 48"	1,500 lb.	6" x 2"	RUBBER	162

Low Noise Steel Platform Trucks

Manufactured from high quality steel. Durable pressed steel platform. Truck with a push/pull handle that folds for easy storage. Sturdy construction. Fitted with non-marking rubber protective buffer strip to protect walls and door frames when truck is in use. Non-slip PVC platform surface ensures maximum grip to eliminate movement of load when in transit. Optional front, rear, left, and right handles are available. Two (2) swivel and two (2) rigid low noise casters for sensitive environments and high quality double ball bearings. Double painted finish.

bearings. Double painted	d finish.		model TRS-2429-DH		model TRS-2431	
MODEL NUMBER	DESCRIPTION	DECK SIZE (W x L)	UNIFORM Capacity	CASTER SIZE	NET WEIGHT (POUND)	
STEEL PLATFORM TRUCK	WITHOUT FOOT BRAKE					
TRS-1924®	Platform Truck, Folding Handle	19" x 24¾"	330 lb.	5"	26	
TRS-1927-2®	Double Deck, Single Handle	19" x 26¾"	330 lb.	5"	36	
TRS-1827-M℗	Steel Truck, Side Nets	17" x 26½"	330 lb.	5"	44	
TRS-2431®	Platform Truck, Folding Handle	24" x 31"	660 lb.	6"	42	
TRS-2429-DH⊛	Steel Truck, Front/Back Handles	24" x 29"	660 lb.	6"	48	
TRS-DH-HDL®	Additional Set of Front/Rear Handles				13	
TRS-2036-SH⊛	Steel Truck, Left/Right Handles	20" x 35½"	660 lb.	6"	51	
TRS-SH-HDL®	Additional Set of Left/Right Handles				17	
TRS-2434-2®	Double Deck, Single Handle	24" x 33½"	660 lb.	6"	63	
TRS-2334-M℗	Steel Truck, Side Nets	22½" x 33½"	660 lb.	6"	70	
STEEL PLATFORM TRUCK	WITH FOOT BRAKE					
TRS-1924-FB®	Platform Truck, Folding Handle, Foot Brake	19" x 24¾"	330 lb.	5"	28	
TRS-1927-2-FB⊛	Double Deck, Single Handle, Foot Brake	19" x 26¾"	330 lb.	5"	38	
TRS-1827-M-FB®	Steel Truck, Side Nets, Foot Brake	17" x 26½"	330 lb.	5"	46	
TRS-2431-FB®	Platform Truck, Folding Handle, Foot Brake	24" x 31"	660 lb.	6"	44	
TRS-2429-DH-FB⊛	Steel Truck, Front/Back Handles, Foot Brake	24" x 29"	660 lb.	6"	50	
TRS-2036-SH-FB⊛	Steel Truck, Left/Right Handles, Foot Brake	20" x 35½"	660 lb.	6"	53	
TRS-2434-2-FB⊛	Double Deck, Single Handle, Foot Brake	24" x 33½"	660 lb.	6"	65	
TRS-2334-M-FB℗	Steel Truck, Side Nets, Foot Brake	221⁄2" x 331⁄2"	660 lb.	6"	72	

48 Hours

to Ship







48 Hours /)to Ship

model NPC1

POWDER COATED

model TRS-1924-F SHOWN WITH FOOT BRAKE





J9







Nestable Multi-Use Cart with Brake

This cart rolls easily on its 6" polyurethane wheels. Brakes automatically lock when cart handle is not squeezed. Ideal in airports, malls, shipping and receiving areas.

MODEL	UNIFORM	OVERALL SIZE	CASTER	NET WT.
NUMBER	Capacity	(W x D x H)	SIZE & TYPE	(POUND)
LUG-B®	550 lb.	26½" x 39½" x 39"	6" POLY	

Nestable Wire Carts

Portable lightweight mesh carts are nestable to minimize storage space. Units roll easily on 6" polyurethane wheels. Steel construction with zinc-plated finish to resist rust. Each cart ships fully assembled and ready to use.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM STATIC Capacity	CASTER TYPE	NET WT. (POUND)
WIRE-S®	17½" x 36 ⁷ /16" x 40¾"	90 lb.	ALL SWIVEL	100
WIRE-L®	28¾" x 59¼" x 36¾"	275 lb.	RIGID & SWIVEL	136
WIRE-M®	28¾" x 52" x 43¼"	90 lb.	ALL SWIVEL	98





MESH STEEL model TWT-2448-M

SOLID STEEL

model TWT-2448-S

model LSC-2448-TC

LOW PROFILE TILT CART

model WIRE-L

model WIRE-M

lew 4

Tilting Work Trucks

48 Hours Ito Ship

Great for use over rough terrain. Sides are included for holding product in place. Solid black urethane foam wheels will not go flat. Open mesh and solid steel decks available. Handle grips for improved comfort. All welded steel construction with blue powder coat finish.

MODEL NUMBER	DECK Style	USABLE SIZE (W x L)	UNIFORM STATIC Capacity	NET WT. (POUND)
TWT-2448-M	OPEN MESH	24 ⁷ /16" x 48"	500 lb.	136
TWT-2448-S	SOLID STEEL	24 ⁷ /16" x 48"	500 lb.	181

Landscape, Nursery, & Agriculture Carts

Transport plants, flowers, trees, shrubs, rocks, and similar materials or parts with our full line of Landscape Carts. These carts are rugged and easy to maneuver with their large pneumatic tires. All carts have mesh sides and bottoms to allow dirt, small rocks, and water to drain through. Steel construction. All carts ship knockdown. Assembly required.

Alto Shit

PLATFORM CART model LSC-2448-PT

48 Hours





FOLD-DOWN SIDES model LSC-2448-4SD

PLASTIC CART model LSC-3052-PCW

Tow Coupler is standard on

model LSC-2448-4SD

model LSC-3052-PCW

CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

MODEL NUMBER	DESCRIPTION	DECK SIZE (W x L)	HEIGHT OF SIDES	DECK HEIGHT	UNIFORM Static capacity	WHEELS SIZE	NET WT. (POUND)
LSC-2448-TC®	LOW PROFILE TILT CART	24" x 48"	3⁄4"	5½"	500 lb.	16" x 4"	49
LSC-2448-PT®	PLATFORM CART	24" x 48"	1 ⁵ /8"	12"	500 lb.	10" x 3½"	67
LSC-2448-SC®	TWO SHELF CART	24" x 48"	1¾"	33"	300 lb.	10" x 3½"	120
LSC-2448-4SD®	FOLD-DOWN SIDES	24" x 48"	12"	14"	1,000 lb.	12½" x 3¾"	74
LSC-3052-PCW®	PLASTIC CRATE CART	30" x 46½"	7½"	14"	1,000 lb.	12½" x 3¾"	75

J10

Plastic Platform Trucks with Fold Down Handle

Tough, high impact-resistant plastic construction is virtually maintenance free. Industrial grade plastic deck will not rust, dent, chip, or discolor. A ¹/₂" lip runs along the perimeter of the deck to help retain cargo. The 36" high steel handle folds down for storage. Units roll smoothly on two (2) rigid and two (2) swivel poly-on-poly casters.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
FPT-1624®	15¾" x 23¾"	5¼"	250 lb.	4" x 1"	19
FPT-1830®	18" x 27¾"	6½"	250 lb.	4" x 1¼"	28
FPT-2133®	21" x 33"	6½"	500 lb.	4" x 1¼"	30
FPT-2537®	25" x 37"	8"	500 lb.	6" x 1½"	42


Low Noise Platform Truck with One-Step Brake System

Low noise platform truck rolls smoothly, quietly on heavy duty non-marking low noise wheels, two (2) swivel and two (2) rigid. Great for use in noise sensitive environments. Durable injection molded plastic platform is fitted with slip resistance pads to aid in load retention. Each truck is fitted with corner buffers along with recessed carrying handles. The easy one-step locking break system will ensure a safe operation when transporting loads. Powder coated folding handle allows for easy storage when not in use.

MODEL	DECK SIZE	HANDLE	UNIFORM	CASTER SIZE	NET WT.
NUMBER	(W x L x H)	HEIGHT	Capacity		(POUND)
VSMT-2453	24" x 53" x 8"	38"	660 lb.	5"	38

Low Noise & Light Weight Plastic Platform Trucks

Light weight plastic platform trucks handle large loads. Ideal for shops, schools, hospitals, supermarkets, warehouses, and offices. Low start resistance to move the loads. 25-30% less force vs. conventional casters. Designed to move loads with less effort. High quality double bail bearings. Injection molded plastic platform with foldable handle for easy storage when not in use. Anti-skidding surface. Extra strong and durable platform. Foldable handle can be attached to opposite side to pull the cart. Handle offers double paint finish. Safety protection covers on handle hinges. Two (2) swivel and two (2) rigid low noise casters.









model TRP-2429-DH

48 Hours

Ito Ship

model TRP-1824

MODEL		DECK SIZE	UNIFORM	CASTER	NET WEIGHT
NUMBER	DESCRIPTION	(W x L)	CAPACITY	SIZE	(POUND)
PLASTIC PLATFORM TRU	CK WITHOUT FOOT BRAKE				
TRP-1824 _☉	Platform Truck, Folding Handle	18" x 23 ⁷ /8"	330 lb.	4"	22
TRP-1824-2®	Double Deck, Single Handle	18" x 23 ⁷ /8"	330 lb.	4"	27
TRP-1827-M®	Plastic Truck, Side Nets	18" x 26½"	330 lb.	4"	42
TRP-2431®	Platform Truck, Folding Handle	23 ⁵ /8" x 31"	660 lb.	5"	33
TRP-2429-DH®	Plastic Truck, Front/Back Handles	23 ⁵ /8" x 28 ³ /4"	660 lb.	6"	77
TRP-DH-HDL®	Additional Set of Front/Rear Handles				32
TRP-2036-SH®	Plastic Truck, Left/Right Handles	20" x 35½"	660 lb.	6"	58
TRP-SH-HDL®	Additional Set of Left/Right Handles				17
TPR-2334-M®	Plastic Truck, Side Nets	221/2" x 337/8"	660 lb.	6"	60
PLASTIC PLATFORM TRU	CK WITH FOOT BRAKE				
TRP-1824-FB®	Platform Truck, Folding Handle, Foot Brake	18" x 23 ⁷ /8"	330 lb.	4"	27
TRP-1824-2-FB®	Double Deck, Single Handle, Foot Brake	18" x 23 ⁷ /8"	330 lb.	4"	32
TRP-1827-M-FB®	Plastic Truck, Side Nets, Foot Brake	18" x 26½"	330 lb.	4"	47
TRP-2431-FB®	Platform Truck, Folding Handle, Foot Brake	23 ⁵ /8" x 31"	660 lb.	5"	38
TRP-2429-DH-FB®	Plastic Truck, Front/Back Handles, Foot Brake	23 ⁵ /8" x 28 ³ /4"	660 lb.	6"	82
TRP-2036-SH-FB®	Plastic Truck, Left/Right Handles, Foot Brake	20" x 35½"	660 lb.	6"	63
TRP-2334-M-FB®	Plastic Truck, Side Nets, Foot Brake	221⁄2" x 33 ⁷ /8"	660 lb.	6"	65



model FPT-1624



Ito Ship

model PPT-2-41

model FF-FPT-1627



48 Hours



Series VHPT/S

CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

Fold-Flat Plastic Cart

Unique cart folds completely flat for storage - telescopic handle folds down and casters fold up. Handle is adjustable to three different heights and features a cushion grip for comfort. Deck includes non-slip rubber grips and hand holes for easy carrying. Carts roll on two (2) rigid and two (2) swivel poly casters. Cart is constructed from plastic, steel, and aluminum components.

s	MODEL	DECK SIZE	DECK	UNIFORM STATIC	CASTER	NET WT.
	NUMBER	(W x L)	HEIGHT	Capacity	SIZE	(POUND)
p	FF-FPT-1627®	16¼" x 26¾"	7¼"	300 lb.	4" x 1"	16

Heavy-Duty Plastic Platform Trucks

Heavy-Duty Plastic Platform Truck will not rust, discolor, or warp. Maintenance free and easy to clean. Honeycomb construction is reinforced for longer life. Extra square steel tube underneath platform to reinforce deck strength. Units roll smoothly on 6" x 2" polyurethane casters. The four wheel cart has two (2) rigid and two (2) swivel casters, while the 6 wheel cart has four (4) swivel and two (2) rigid casters. Handle height 38".

MODEL NUMBER	DECK SIZE (W x L)	HEIGHT	UNIFORM STATIC Capacity	NUMBER OF CASTERS	NUMBER OF HANDLES	NET WT. (POUND)
PPT-2-41 ℗	30" x 60"	7½"	2,000 lb.	4	1	148
PPT-2-42®	30" x 60"	7½"	2,000 lb.	4	2	158
PPT-3-61®	30" x 60"	7½"	3,000 lb.	6	1	169
PPT-3-62®	30" x 60"	7½"	3,000 lb.	6	2	172

Versatile Platform Truck with Fold Down Handle

Transport products quickly and easily in commercial or industrial applications with our Versatile Platform Truck. Adjustable handle for pushing or pulling applications, folds down for storage. Will not rust, chip, or dent. Unit rolls smoothly on polyurethane casters.

MODEL NUMBER	DECK SIZE (W x L x H)	HANDLE HEIGHT Pulling/Pushing	UNIFORM STATIC Capacity	CASTER Size	NET WT. (POUND)
PC-25®	20½" x 31½" x 6"	325/8" / 361/2"	250 lb.	5"	24
PC-60®	20½" x 31½" x 6"	355/8" / 38"	600 lb.	5"	24

Hardwood Platform Trucks

Hardwood Platform Trucks are the economical solution to your material handling needs. Constructed of %" thick hardwood, these platform trucks have a maximum capacity of 1,600 pounds. Units roll smoothly on 6" x 2" mold-on-rubber casters, two (2) rigid and two (2) swivel. Casters and removable chrome plated push handle are bolted on. Countersunk holes allow for a smooth deck surface.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM Capacity	CASTER Type	NET WT. (POUND)
HARDWOOD DECK					
VHPT-2448*®	24" x 48"	9½"	1,600 lb.	MOLD-ON-RUBBER	77
VHPT-2754*⊛	27" x 54"	9½"	1,600 lb.	MOLD-ON-RUBBER	92
VHPT-3060*®	30" x 60"	9½"	1,600 lb.	MOLD-ON-RUBBER	105
VHPT-3672 ®	36" x 72"	9½"	1,600 lb.	MOLD-ON-RUBBER	168
HARDWOOD DECK	WITH STEEL FRA	ME			
VHPT/S-2448	24" x 48"	9¾"	1,600 lb.	MOLD-ON-RUBBER	159
VHPT/S-2754	27" x 54"	9¾"	1,600 lb.	MOLD-ON-RUBBER	175
VHPT/S-3060	30" x 60"	9¾"	1,600 lb.	MOLD-ON-RUBBER	198
VHPT/S-3672	36" x 72"	9¾"	1,600 lb.	MOLD-ON-RUBBER	228

HANDLE DESIGN MAY VARY FROM WHAT IS SHOWN

(4) 8" x 2" PNEUMATIC CASTERS (CAPACITY 1,200 LBS.), MODEL VHPT-PNU

J12

Semi-Live Hardwood Skids & Lever Jack

The Semi-Live Hardwood Skids and Lever Jack are ideal for distribution and shipping industries. The unit is constructed of 7%" thick hardwood platform with two (2) rigid 6" x 2" mold-on-rubber casters for smooth portability. The front of the unit includes attached legs which create stability once unit is in the level position. The optional lever jack allows the unit to be transported while still maintaining an ergonomic position. Handle measures 58" long.

MODEL NUMBER	SKID SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	NET WT. (POUND)
VHPT-SL-24	24" x 48"	9 ³ /8"	1,600 lb.	56
VHPT-SL-27	27" x 54"	9 ³ /8"	1,600 lb.	59
VHPT-SL-30	30" x 60"	9 ³ /8"	1,600 lb.	63
VHPT-SL-36	36" x 72"	9 ³ /8"	1,600 lb.	75
VHPT-SL-JACK	SE	25		

Wood Platform Tilting Trucks

Tilting Wood Platform Trucks make it easy to transport your material handling products. Sanded and varnished deck of 1" select hardwood on 2" x 6" side sills, and cross bolsters 1/14" hardwood are removable. Load wheels are 12" x 2 $\frac{1}{2}$ " on 1" dia. axle with 6" x 2" end casters.

MODEL NUMBER	DECK SIZE (W x L x H)	UNIFORM Capacity	CASTERS	NET WT. (Pound)
HWPC-2448	24" x 48" x 16¼"	2,200 lb.	MOLD-ON-RUBBER	215
HWPC-3048	30" x 48" x 16¼"	2,200 lb.	MOLD-ON-RUBBER	235
HWPC-3060	30" x 60" x 16¼"	2,200 lb.	MOLD-ON-RUBBER	245
HWPC-3660	36" x 60" x 16¼"	2,200 lb.	MOLD-ON-RUBBER	260
HWPC-3672	36" x 72" x 16¼"	2,200 lb.	MOLD-ON-RUBBER	275

Corner and Surface Guards & Bumpers

Reduce damage to walls, furniture, and machinery from cart and platform truck impact. Thermoplastic rubber construction with steel insert provides impact absorption. Easily attaches to any steel, aluminum, wood, or plastic surface. Mounting hardware not included.

ТҮРЕ	MODEL NUMBER	STYLE	WIDTH	LENGTH	HEIGHT	THICKNESS	QTY. PER Carton	NET WT. (POUND)
Α	CB-1 ℗	CORNER	3 ¹ /8"	3 ¹ /8"	⁵ /8"	⁵ /8"	28	4
В	CB-2®	CORNER	3 ¹⁵ / ₁₆ "	3 ¹⁵ /16"	1 ¹ /16"	1 ¹ /16"	16	5
С	CB-3®	CORNER	4 ¹ / ₄ "	4 ¹ / ₄ "	1 ¹ /16"	1 ¹ /16"	12	4
D	CB-4®	CORNER	4"	4"	1"	⁷ /8"	20	5
Е	SB-12®	EDGE		12"	1 ³ / ₁₆ "	1 ³ /16"	12	5
F	EB-1 ℗	EDGE	1 ¹ / ₁₆ "	240"	⁵ / ₁₆ "	⁵ / ₃₂ "	1	11
G	RB-1 ℗	ROUND	3 ¹ / ₄ "	DIAMETEI	R, ⁵ /16" BC	ORE	16	5
Н	RB-2 ®	ROUND	5" D	IAMETER	, ⁷ /16" BO	RE	16	6

Nestable Panel Cart

Unique design saves valuable space when stored. Overall size of each cart is $72\frac{1}{2}$ "W x $32\frac{1}{2}$ "D x $39\frac{1}{2}$ "H. Each additional cart only requires an additional $10\frac{1}{2}$ " of space. Features front storage area for handling paneling and sheet goods. Rear shelf is ideal for storing smaller products. Each unit includes four (4) 5" x $1\frac{1}{4}$ " poly-on-poly swivel casters; one with a total locking brake. Welded steel construction. Powder coat blue finish.

MODEL	OVERALL SIZE	UNIFORM	CASTER	CASTER	NET WT.
NUMBER	(W x D)	Capacity	SIZE	Type	(POUND)
PRCT-N	72½" x 32½"	2,000 lb.	5" x 1¼"	POLY-ON-POLY	169





New

J13



Panel Cart

The Panel Cart is perfect for handling items such as sheets of paneling, plywood, doors, and lumber. A convenient, removable plastic basket is included for carrying smaller items and tools. Rollers are provided on one end for easy loading and unloading. Two (2) rigid and two (2) swivel 4" x 2" glass-filled nylon casters are included. Ships knockdown, assembly required. Steel construction. Powder coat blue finish. Overall height is 401/2".

MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC Capacity	CASTER SIZE	CASTER TYPE	NET WT. (POUND)
PRCT [®]	26" x 32"	2,000 lb.	4" x 2"	GFN*	121
*GLASS-FILLED NYLON					

Heavy-Duty Panel Cart

You get double your money's worth with this Heavy-Duty Panel Cart. Not only is it the perfect panel cart for transporting plywood, drywall, paneling, doors, etc.; it transforms into a platform truck when you remove the 27" high support rails. This cart is powder coated blue and features a side retainer lip that keeps cargo on the deck. Two (2) rigid and two (2) swivel 5" x 2" poly-onsteel casters included. Ships knockdown, assembly required. Overall height is 34".

MODEL	DECK SIZE	UNIFORM STATIC	CASTER	CASTER	NET WT.
NUMBER	(W x L)	Capacity	SIZE	TYPE	(POUND)
PRCT-HD®	29½" x 36"	4,000 lb.	5" x 2"	POLY-ON-STEEL	

48 Hours

Vertical Panel Cart

Heavy duty steel platform cart supports multiple sizes of sheet material such as paneling, plywood, drywall or anything that is long, bulky, and hard to handle. Ideal for lumberyards and hardware stores. Rolls on four (4) 5" x 11/2" swivel poly-on-steel and two (2) 8" x 2" rigid poly-on-steel casters. Center caster provides great maneuverability.

MODEL	OVERALL SIZE	UNIFORM STATIC	CASTER	CASTER	NET WT.
NUMBER	(W x L x H)	Capacity	SIZE	TYPE	(POUND)
PANEL-V®	30" x 48" x 47"	2,000 lb.	(4) 6" & (2) 8"	POLY	177

Drywall & Panel Cart 48 Hours

Versatile cart for moving drywall, wood, and other types of panel products. Maximum usable panel height is 60". Portable on two (2) rigid and two (2) swivel casters. Welded steel construction with painted finish. Knock-down design for lower shipping costs.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM STATIC Capacity	CASTER SIZE	CASTER TYPE	NET WT. (POUND)
PRCT-S-MR®	23" x 48" x 48"	3,000 lb.	2" x 8"	RUBBER	89
PRCT-S-GN®	23" x 48" x 48"	3,000 lb.	2" x 8"	GFN*	90
*GLASS FILLED NYLON	J				

Low Platform Panel Carts

All purpose large flat panel cart is constructed of steel. Features removable uprights and an easy-roll entry roller on one end. Carts roll smoothly on two (2) rigid and two (2) swivel 8" x 2" phenolic casters with side brakes. Durable powder coat finish.

MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC Capacity	PLATFORM HEIGHT	NET WT. (POUND)
DWC-EL-36	12" x 39½"	2,000 lb.	5"	245
DWC-EL-48	12" x 51½"	2,000 lb.	5"	302
DWC-EL-60	12" x 64"	2,000 lb.	5"	359
DWC-EL-72	12" x 75½"	2,000 lb.	5"	416



LOW PROFILE DESIGN

CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

Panel Trucks with Storage Tray

Heavy-duty panel truck with built-in storage tray for use with steel and panel goods. Great for use in home centers, warehouses, and similar locations. Deck opening will hold panels up to 11" thick. Steel deck includes a 2" high lip for holding goods. Overall height is 46", while the deck height is 11". Steel construction with powder coat blue finish.

MODEL NUMBER	PLATFORM Size (W x L)	UNIFORM STATIC Capacity	CASTER TYPE	NET WT. (POUND)
PRCT-T-2448-MR	24" x 48"	1,000 lb.	MOLD-ON-RUBBER	207
PRCT-T-2448-PU	24" x 48"	1,500 lb.	POLY-ON-STEEL	219
PRCT-T-3060-MR	30" x 60"	1,000 lb.	MOLD-ON-RUBBER	250
PRCT-T-3060-PU	30" x 60"	1,500 lb.	POLY-ON-STEEL	265

Horizontal Panel Cart

This two tier cart is great for handling panels and small items. The top deck is 30" high while the bottom deck is 8" off the ground. Four sliding posts can be locked in the up position to prevent products from sliding. Rolls on four (4) $1\frac{1}{2}$ " x 5" swivel and two (2) 2" x 8" rigid polyolfin casters. Center caster provides great maneuverability.

MODEL	OVERALL BASE	OVERALL TOP	UNIFORM STATIC	NET WT.
NUMBER	(W x L x H)	(W x L x H)	Capacity	(POUND)
PANEL-H®	29" x 42" x 10¾"	29" x 64" x 41"	2,000 lb.	207

Lightweight Door & Panel Dolly

Lightweight door and panel dolly with auto-clamp feature. Unique design grips plate/ slab when weight is added. Opening for use with maximum 2¼" thick plate/slab. Steel construction with painted blue finish.

MODEL	UNIFORM STATIC	CASTER	CASTER	NET WT.
NUMBER	Capacity	SIZE	TYPE	(POUND)
PLDL-LD-2-4PP®	350 lb.	4"	POLY-ON-POLY	10

Heavy-Duty Plate/Slab Dollies

Heavy-duty plate/slab dolly with auto-clamp feature. Unique design grips plate/slab when weight is added. Opening for use with maximum 4" thick plate/slab. Hand holds are great for carrying. Strap (not included) can also be hooked to hand holds. Several different caster types to choose from. Steel construction with padded inside.

MODEL NUMBER	UNIFORM STATIC Capacity	WHEEL SIZE	CASTER Type	NET WT. (POUND)
PLDL-HD-4-8MR®	1,200 lb.	8"	RUBBER-ON-STEEL	28
PLDL-HD-4-8PS®	1,500 lb.	8"	POLY-ON-STEEL	28
PLDL-HD-4-8GFN®	1,500 lb.	8"	GLASS-FILLED NYLON	24
PLDL-HD-4-10PN®	750 lb.	10"	PNEUMATIC	24
PLDL-HD-4-10FF®	500 lb.	10"	FOAM-FILLED	23

Adjustable Panel Dollies

The Adjustable Panel Dollies are adjustable from 0 to 9" with positive locking clutch plates that allow for easier release and adjustment. Steel construction with powder coat yellow finish.

UNIFORM STATIC CAPACITY	WHEEL SIZE	CASTER TYPE	NET WT. (POUND)
1,000 lb.	8"	RUBBER-ON-STEEL	38
1,000 lb.	8"	POLY-ON-STEEL	38
1,000 lb.	8"	GLASS-FILLED NYLON	36
600 lb.	10"	PNEUMATIC	35
500 lb.	10"	FOAM-FILLED	35
	CAPACITY 1,000 lb. 1,000 lb. 1,000 lb. 600 lb.	CAPACITY SIZE 1,000 lb. 8" 1,000 lb. 8" 1,000 lb. 8" 1,000 lb. 8" 600 lb. 10"	CAPACITY SIZE TYPE 1,000 lb. 8" RUBBER-ON-STEEL 1,000 lb. 8" POLY-ON-STEEL 1,000 lb. 8" GLASS-FILLED NYLON 600 lb. 10" PNEUMATIC





model PLDL-ADJ-8GFN

model PLDL-HD-4-10FF

CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

48 Hours

)to Ship









Easy Move Panel Cart

The Easy Move Panel Cart is ergonomically designed for quickly and easily moving sheets of plywood or drywall down small aisles or through doorways. To prevent tipping, rollers have been added to the front and back of the unit for support. Includes two (2) $10" \ge 2\frac{1}{2}"$ solid rubber and two (2) 3" steel wheels standard. Sloped platform is $21" \ge 8\frac{1}{2}"$.

MODEL NUMBER	UNIFORM Static capacity	CASTER SIZE	NET WT. (POUND)
HT-PANEL®	750 lb.	(2)10" x 2½" & (2) 3"	108

A-Frame Carts

If you need to move bulky sheets of material such as drywall, plywood, paneling, or sheets of metal, you need the heavy-duty A-Frame Cart. A 7/8" high lip along the length of the cart prevents materials from sliding off. A convenient parts tray is included between the A-frame uprights. Unit is easily secured for loading and unloading by using the foot operated caster lock. Includes two (2) rigid and two (2) swivel casters. All steel construction with a durable powder coat finish. Ships knockdown, assembly required.

MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC Capacity	CASTER SIZE	CASTER TYPE	NET WT. (POUND)
AF-2436	24" x 36"	2,000 lb.	5" x 2"	POLY-ON-STEEL	152
AF-2448	24" x 48"	2,000 lb.	5" x 2"	POLY-ON-STEEL	171
AF-3048	30" x 48"	2,000 lb.	5" x 2"	POLY-ON-STEEL	192
AF-3060	30" x 60"	2,000 lb.	5" x 2"	POLY-ON-STEEL	201
AF-3672	36" x 72"	2,000 lb.	5" x 2"	POLY-ON-STEEL	248

A-Frame Steel Trucks

A-Frame Steel Trucks make it easy to move sheets and panels. All steel frames with 3/16" angle base, ¼" A-frame and ¼" angel nose plate. L-shaped lugs on rear of frame support length of pipe which can be inserted to support extra-long loads. Units come with four (4) swivel casters 5"x1½".

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM STATIC Capacity	CASTERS	NET WT. (POUND)
AFC-2242-R	22¾" x 42-5/8" x 47"	800 lb.	MOR*	100
AFC-2242-P	22¾" x 42 -5/8" x 47"	1,500 lb.	PHENOLIC	100
AFC-2242-M	22¾" x 42 -5/8" x 47"	1,500 lb.	METAL	100

*MOLD-ON-RUBBER

A-Frame Storage Cart

The portable A-Frame Cart with storage rack is ideal for storage and transporting pipe, conduit, and other types of bar material. Storage arms extend 12" beyond frame with a clearance of $7\frac{1}{4}$ " between arms. Unit rolls on two (2) rigid and two (2) swivel 5" poly-on-steel casters with brakes. Base is powder coat blue, while the storage rack is zinc plated.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM Static capacity	CASTERS	NET WT. (POUND)
AFSR-3672	36" x 72" x 66"	2,000 lb.	POLY-ON-STEEL	245

Platform Carts with Versatile Dividers

These innovative units are perfect for transporting a large array of products throughout your warehouse. The removable handles can be configured in a way to optimize space and convenience. Each unit includes five (5) sets of removable handles. Units roll smoothly on four (4) 5" x 2" swivel phenolic and two (2) 5" x 2" rigid phenolic casters. Casters are mounted in "tilt" configuration for easy in-place turning.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM STATIC Capacity	WHEELS	NET WT. (POUND)
VERSA-3060	30" x 60¼" x 9"	3,000 lb.	5" x 2"	255
VERSA-3672	36" x 72¼" x 9"	3,000 lb.	5" x 2"	328

Chair and Table Rack is ideal for the material handling and hospitality industries. The steel construction allows the unit to withstand longtime use. The rack truck can be used to transport, as well as, store tables and chairs. The unit rolls on four (4) casters for smooth transition when transporting from workstation to workstation. Capacity is 1,000 pounds

MODEL	OVERALL SIZE	CHAIR/TABLE	WHEELS	NET WT.
NUMBER	(W x L x H)	Capacity		(POUND)
CTRT-36	63" x 33" x 73"	36/4	5" x 1¼"	189

Traffic Cone Cart

The Traffic Cone Cart is used for transporting and storing traffic cones. The cart is designed with a steel construction and a powder coat finish for strength and durability. The 10" foam filled wheels make transporting cones over rough surfaces, easier. Unit holds and displays aluminum directional signs. Two signs, which are printed on both sides, are included. Brackets are attached for holding high-visibility orange traffic control flags. Cones and flags sold separately. Custom signs available.

MODEL NUMBER	NUMBER OF Cone tiers	OVERALL SIZE (W x D x H)	USABLE BASE SIZE (W x D)	CAPACITY	NET WEIGHT (POUND)
CCONE-S-1	SINGLE	26"W x 26"D x 48"H	19" x 19"	200 lb.	60
CCONE-S-2	DOUBLE	52"W x 26"D x 48"H	38" x 19"	400 lb.	120
CCONE-FLAG	OPTION	IAL ORANGE TRAFFIC	C CONTROL	FLAG	1

Multi-Tier Stock Carts

This unique cart makes it easy to organize and reach parts. Tilting shelves allow easy access to baskets. Ideal for stocking parts in work stations. Casters allow the parts to be moved to wherever they are needed. Shelves will tilt between 0° and 45°. Shelf angle is locked with a hand operated friction lock screw. Bottom shelf includes a 2" high lip on all four sides. Middle and top shelves include a 1½"H lip on all four sides. Bottom shelf height is 5½". Middle shelf height is 33". Top shelf height is 56¼". Overall cart size (not including baskets) is 18¼"W x 27½"L x 60"H (35"H for two-shelf models). Rolls smoothly on two (2) rigid and two (2) swivel 4" x 2" casters. Steel construction. Powder coat finish.

MODEL NUMBER	SHELF SIZE (W x L)	UNIFORM STATIC Capacity	BASKET SIZES (W x L x H)	NET WEIGHT (POUND)
TSCT-2®	16" x 24"	200 lb.	NONE	108
TSCT-3®	16" x 24"	300 lb.	NONE	164
TSCT-2B®	16" x 24"	200 lb.	(1) 15½" x 23½" x 16½" (1) 15½" x 23½" x 12½"	154
TSCT-3B⊛	16" x 24"	300 lb.	(1) 15½" x 23½" x 16½" (1) 15½" x 23½" x 12½" (2) 11½" x 15½" x 8½"	182
ADDITIONAL P	LASTIC BINS			·
TSCT-LGB		15½"W x 23½"I	_ x 16½"H	10
TSCT-MDB		15½"W x 23½"I	_ x 12½"H	8
TSCT-SMB		11½"W x 15½"l	_ x 8½"H	4

Space Saving Roll Containers

The Space Saving Roll Container is great for distributing and packaging facilities. The unit rolls smoothly and quietly on swivel casters with included brakes for excellent control. The construction is lightweight and functionally durable for moving and storing products.

MODEL NUMBER	OVERALL SIZE (W x D x H)	INSIDE SIZE (W x D x H)	TOTAL Capacity	NET WT. (POUND)
ROLP-2331	33½" x 23¼" x 67"	31½" x 21½" x 57"	900 lb.	115
ROLP-2331-APS	PLASTIC SHELF	21½" x 32½"	200 lb.	11
ROLP-3143	42½"" x 31½" x 67"	41" x 29½" x 57"	1,100 lb.	149
ROLP-3143-APS	PLASTIC SHELF	27 ⁵ /8" x 44 ¹ /8"	200 lb.	19



SHIPPING PURPOSES

model ccone-s-1



Folding Security Truck

This portable cart is designed to safely hold your valuable equipment. All welded components and wire mesh walls combine to make this truck extremely tough and strong. Center shelf folds down to create two (2) 321/2"H areas or remains in the up position to provide full 661/2"H area of storage. Special door locking latch and padlock clasp (padlock not included) for securing stored contents. Rolls on 6" x 2" molded-on-rubber swivel casters with brakes. The overall size is 27"W x 44"L x 761/2"H. The usable size with shelf down is 421/2"W x 241/2"D x 321/2"H and with the shelf up 411/2"W x 24"D x 661/2"H. Unit will fold down to 76"W x 51"D x 12"H for storage or transport.

MODEL	OVERALL SIZE	UNIFORM STATIC	FINISH	NET WT.
NUMBER	(W x D x H)	Capacity		(POUND)
FST-2744-2	44" x 27" x 76½"	2,000 lb.	PAINTED GREY	267

Security Trucks with Plastic Base

The Security Trucks are great for distributing and storage facilities. The unit rolls smoothly and quietly on low noise on 6" casters. Features two (2) swivel and two (2) swivel casters with brakes. The plastic base creates a sturdy platform for transporting goods. The mesh sides allow for products inside to be visible, while still being safe and secure.

MODEL NUMBER	OVERALL SIZE (W x D x H)	UNIFORM Static capacity	NET WT. (POUND)
FSTP-2533	33½" x 25½" x 67"	900 lb.	103
FSTP-2533-AS	22" x 32½" x 2¼"	200 lb.	17
FSTP-3143	43½" x 31½" x 67"	1,100 lb.	163
FSTP-3143-AS	27" x 41" x 2¼"	200 lb.	17

ADDITIONAL SHELF SUFFIX "AS'



model ROL-1834-3



model FSTP-3143





model ROL-55

Foldable/Nestable **Roller Containers**

Provides convenient portability between work cells or for delivery or distribution of goods. All welded steel construction. Units roll smoothly on casters. To figure individual uniform shelf capacity divide the number of shelves by total capacity.





model ROL-3143-2

model ROL-85









model ROL-120

NUMBER OF TOTAL UNIFORM **OVERALL SIZE** MESH MODEL NET WT. NUMBER SHELVES (W x D x H) OPENINGS CAPACITY CASTERS (POUND) **BLUE PAINTED FI** ROL-1834-3 34" x 18" x 59' 3¼" x 11' 990 lb. 11/2" x 5" (4) swivel w/brakes 3 116 ROL-3143-2 2 40" x 28" x 68" 13³/8" x 6¹/4' 1,100 lb. 11/4" x 5" (2) swivel w/brakes & (2) rigid 160 ROL-3143-1 43¼" x 31¾" x 66¾" 13³/8" x 6¹/4' 880 lb. 11/4" x 5" (2) swivel w/brakes & (2) rigid 135 1 GALVANIZED FI ROL-55 261/4" x 233/8" x 355/8" 2" x 17/8" 660 lb. 1¼" x 5" (2) swivel w/brakes & (2) rigid 60 1 12½" x 4" **ROL-80** 1 28¼" x 31½" x 66" 660 lb. 11/2" x 5" (2) swivel w/brakes & (2) rigid 103 ROL-85 2 271/2" x 32" x 681/4" 181/2" x 41/8" 660 lb. 11/4" x 5" (2) swivel w/brakes & (2) rigid 120 ROL-95 1 26³/8" x 32" x 59" 15¾" x 3¾" 660 lb. 11/2" x 5" (2) swivel w/brakes & (2) rigid 125 **ROL-185** 1 431/2" x 30" x 69" 21/2" x 11/2" 660 lb. 11/2" x 6" (2) swivel w/brakes & (2) rigid 196 24" x 32¼" x 66" 880 lb. 1¾" x 5" (2) swivel w/brakes & (2) rigid 145 **ROL-120** 1 1¾" x 1¾"



model FSTP-2533





J18

Foldaway Hand Truck

Designed for everyday, all purpose use. The handle and wheels fold up quickly and easily allowing you to store it in tight spaces such as trunks of cars, under tables, or in closets.

MODEL	FOLDED SIZE	SIZE UNFOLDED	UNIFORM	NET WT.
NUMBER	(W x L x H)	(W x L x H)	Capacity	(POUND)
FHC-250®	19" x 2¾" x 26"	19" x 17" x 40½"	250 lb.	12

4 Wheel Pneumatic/Hard Rubber Hand Truck

The most versatile and easy moving hand truck available. The 4 wheel design, two (2) pneumatic and two (2) hard rubber, allows the operator to easily move and position awkward loads. The weight and size of the load determine how much the hand truck rubber wheels are utilized. Ideal on rough floors and with awkward heavy loads.

MODEL	NOSE PLATE	OVERALL SIZE	UNIFORM	NET WT.
NUMBER	(W x D)	(W x D x H)	Capacity	(POUND)
SPHT-500S-DW®	22" x 7"	22" x 19" x 52"	600 lb.	49

Fiber/Nylon Hand Truck

Transport lightweight loads with this Fiber/Nylon Hand Truck. The unique construction is stronger than steel, yet lighter and more cost effective than aluminum. The $10" \ge 3\frac{1}{2}"$ pneumatic wheels provide a smooth ride and years of durability. Uniform static capacity is 500 pounds.

MODEL	NOSE PLATE	UNIFORM	OVERALL SIZE	NET WT.
NUMBER	(W x D)	Capacity	(W x D x H)	(POUND)
FNHT-500	14" x 7"	500 lb.	21" x 18" x 48"	22

Dual Handle Hand Trucks

Maximize control for different loads with our Dual Handle Hand Trucks. These hand trucks can transport boxes or crates wherever they are needed. Transport loads smoothly and evenly over rough or uneven floors. Ships knockdown. Choose steel or aluminum, available with pneumatic or solid rubber wheels. Assembly required.

STEEL DUAL HANDLE HAND TRUCKS

	NOSE PLATE (W x D)	UNIFORM Capacity	OVERALL SIZE (W x D x H)	NET WT. (POUND)		
NOMBEN			· · · · ·	(FOOND)		
	10 X 2	' HARD RUBBER WI	HEELS			
DHHT-500S-HR®	13¾" x 6½"	500 lb.	21" x 17½" x 44½"	40		
10" x 3 ¹ / ₂ " PNEUMATIC WHEELS						
DHHT-500S®	13¾" x 6½"	500 lb.	22½" x 17½" x 44½"	30		

ALUMINUM DUAL HANDLE HAND TRUCKS

MODEL NUMBER	NOSE PLATE (W x D)	UNIFORM Capacity	OVERALL SIZE (W x D x H)	NET WT. (POUND)				
	10" x 2" HARD RUBBER WHEELS							
DHHT-500A-HR*	14" x 7¼"	500 lb.	20" x 18½" x 52"	36				
DHHT-500A-ANP-HR*	18" x 7½"	500 lb.	20" x 18½" x 52"	33				
10" x 3½" PNEUMATIC WHEELS								
DHHT-500A*	14" x 7¼"	500 lb.	20" x 18½" x 52"	24				
DHHT-500A-ANP*	14" x 7¼"	500 lb.	20" x 18½" x 52"	24				

*SUFFIX ANP NOTES ALUMINUM NOSE PLATE

Site Carts/Trucks

This large cart with big wheels works great to move items around in rough terrain. Landscaping is easier due to the oversized nose plate (holds shrub balls for transport). The wheels are 16" x $4\frac{1}{2}$ ". Welded steel construction with powder coat yellow finish. Uniform static capacity is 600 pounds.

MODEL NUMBER	NOSE PLATE (W x D)	OVERALL SIZE (W x D x H)	WHEEL STYLE	NET WT. (POUND)
SITE-C®	24" x 13"	34¼" x 23" x 58"	PNEUMATIC	132
SITE-C-FF®	24" x 13"	34¼" x 23" x 58"	FOAM-FILLED	132





"P" Handle Hand Trucks

The "P" style hand trucks are ideal for transporting heavy and awkward loads. These trucks work well for the user that needs to free up one hand. The "P" shaped handle makes the truck easy to steer and maneuver. Assembly required.

STEEL "P" HANDLE HAND TRUCKS

MODEL NUMBER	NOSE PLATE (W x D)	UNIFORM Capacity	OVERALL SIZE (W x D x H)	NET WT. (POUND)		
	10" x 2" HAR	D RUBBER WHEELS				
SPHT-500S-HR®	13¾" x 7½"	500 lb.	21" x 18" x 52"	33		
SPHT-500S-HD-HR®	22" x 7"	600 lb.	22" x 19" x 52"	43		
	10" x 3½" P	NEUMATIC WHEELS				
SPHT-500S®	13¾" x 7½"	500 lb.	21" x 18" x 52"	23		
SPHT-500S-HD®	22" x 7"	600 lb.	22" x 19" x 52"	32		
13" x 4" PNEUMATIC WHEELS						
SPHT-600S-IND®	14" x 7"	600 lb.	22" x 22" x 52"	31		

model SPHT-500S-HD model SPHT-600S-IND

8 Hours

to Ship

ALUMINUM "P" HANDLE HAND TRUCKS

MODEL NUMBER	NOSE PLATE (W x D)	UNIFORM Capacity	OVERALL SIZE (W x D x H)	NET WT. (POUND)		
10" x 2" HARD RUBBER WHEELS						
APHT-500A-HR®	14" x 7½"	500 lb.	20" x 19" x 50½"	37		
10" x 3 ¹ / ₂ " PNEUMATIC WHEELS						
APHT-500A®	18" x 7⁵/ଃ"	300 lb.	20¾" x 19¼" x 52"	25		
AFTI-JUVA®	10 X / 7/8	500 ID.	20/4 x 19/4 X 32	20		

model APHT-500A-HR

STAINLESS STEEL "P" HANDLE HAND TRUCKS

•								
MODEL	NOSE PLATE	UNIFORM	OVERALL SIZE	NET WT.				
NUMBER	(W x D)	CAPACITY	(W x D x H)	(POUND)				
10" x 2" HARD RUBBER WHEELS								
SPHT-500-HD-SS-HR®	22" x 7"	600 lb.	22" x 19" x 52"	45				
SPHT-500-SS-HR®	13¾" x 7½"	500 lb.	21" x 18" x 52"	45				
10" x 3½" PNEUMATIC WHEELS								
SPHT-500-HD-SS®	22" x 7"	600 lb.	22" x 19" x 52"	35				
SPHT-500-SS®	13¾" x 7½"	500 lb.	21" x 18" x 52"	24				
AXLE AND WHEEL HUB NOT ST	AINLESS STEEL							



Four Wheel Multi-Position **Steel Hand Trucks**

Great for uneven surfaces and outdoor work. 4" x 1" mold-on-rubber swivel casters are located at the back of the cart to stabilize loads and prevent tipping. The back casters will also transform the unit into a horizontal platform truck. The unit will lie back horizontally, the handle will release to a standard position, and now the cart is a platform truck. 10" x 3¹/₂" pneumatic casters. Ships knockdown.

	MODEL NUMBER	NOSE PLATE (W x D)	UNIFORM Capacity	OVERALL SIZE (W x D x H)	NET WT. (POUND)
HAND TRUCK	TWC-400®	16¼" x 11 ²⁷ /32"	400 lb.	24¼" x 21¾" x 49½"	64
PLATFORM TRUCK			400 lb.	24¼" x 48½" x 32"	
HAND TRUCK	TWC-600-DLX	14" x 8½"	600 lb.	22¼" x 19½" x 51¾"	51
PLATFORM TRUCK			600 lb.	23" x 50½" x 43"	

model APHT-500A

48 Hours Ito Ship

model

model SPHT-500-HD-SS

Hand Trucks with Fold-Down Platform

This lightweight aluminum hand truck features an integral work bench. Work bench conveniently folds flat for storage. Now a sturdy work bench can be moved to where it is needed most. Provides for a more comfortable and ergonomically correct work position. P-handle design allows for easy maneuverability. Hand truck rolls smoothly on 10" solid foam urethane wheels. Nose plate, while in the hand truck position, is 71/2" x 14". Uniform capacity of cart is 500 pounds and shelf capacity is 100 pounds. Assembly required.

MODEL NUMBER	FOLD-DOWN Platform	OVERALL SIZE (W x D x H)	WHEEL COLOR	NET WT. (POUND)
ALUM-P-TB	13"W x 30"D	18" x 17" x 55"	BLACK	47
ALUM-P-TB-UFBL	13"W x 30"D	18" x 17" x 55"	BLUE	47
ALUM-P-TB-UFRD	13"W x 30"D	18" x 17" x 55"	RED	47
ALUM-P-TB-UFYL	13"W x 30"D	18" x 17" x 55"	YELLOW	47
ALUM-P-TB-UFBK	13"W x 30"D	18" x 17" x 55"	BLACK	47

Fold-Down Aluminum Hand Trucks

Lightweight aluminum hand truck folds-down for storage. Telescopic upright is adjusted with spring-loaded locking mechanism. Noseplate measures 1134"W x 81/4"L. Dual handle design with plastic grips and knuckle guards. Rolls smoothly with two (2) 10" diameter wheels. Wheel guards are included for use with oversize objects. Overall extended size 19¼"W x 18"L x 48½"H. Overall size folded 19¼"W x 12"L x 33"H. Units ships fully assembled and ready to use.

MODEL NUMBER	WHEEL TYPE	UNIFORM Capacity	NET WT. (POUND)
DHHT-250A-FD-PN®	Pneumatic	250 lb.	19
DHHT-250A-FD-UR®	Red Flat-Free Urethane	250 lb.	21
DHHT-250A-FD-UB®	Blue Flat-Free Urethane	250 lb.	22
DHHT-250A-FD-UY®	Yellow Flat-Free Urethane	250 lb.	22
DHHT-250A-FD-UBK®	Black Flat-Free Urethane	250 lb.	18

Deluxe Aluminum Hand Trucks


Maximize control for different types of loads. These hand trucks can transport boxes wherever they are needed. Transport loads smoothly and evenly over rough or uneven floors. 10" x 3¹/₂" pneumatic tires are standard on all hand trucks. 10" x 2¹/₂" industrial solid rubber tires also available. The convertible hand trucks have 10" x 3¹/₂" pneumatic tires and 5" x 1¹/₄" poly-on-steel swivel casters. Optional stair guides available. Assembly required.





model ALUM-P

model ALUM-H model ALUM-LOOP model ALUM-LOOP-H model ALUM-PIN model ALUM-CONV-B model ALUM-3-CONV

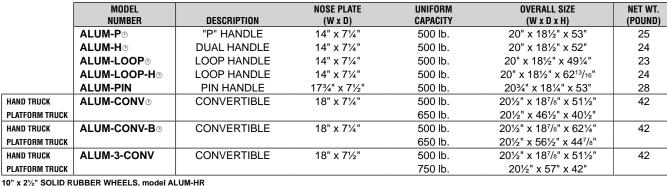

OPTIONAL STAIR GUIDES, model ALUM-SG

J21



model ALUM-P-TB





model APPL-500-Y

model APPL-1200-66

Hours to Ship

Dual Directional Hand Truck

The Dual Directional Hand Truck works great as a standard two-wheel hand truck or as a panel cart. This unit allows the user to transport loads forward/backward or left/right. You can transport loads of crates or boxes or by turning the 8" x 2" mold-on-rubber wheels, you can turn the hand truck into a panel cart. Moving down narrow aisles or doorways is no longer a problem with the adjustable wheels and easy steering. Steel construction. Painted finish. Assembly required.



MODEL	NOSE PLATE	OVERALL SIZE	UNIFORM	NET WT.
NUMBER	(W x D)	(W x D x H)	Capacity	(POUND)
DDT-500®	14" x 8"	20" x 18" x 51"	600 lb.	

Appliance Carts

This cart is ideal for moving large, bulky, heavy appliances, and awkward loads. A strap and tension bar are included with this unit to hold the product in place while transporting up or down stairways, hills, or uneven surfaces. Strap length is 120"

MODEL NUMBER	OPERATION	NOSE PLATE (W x D)	UNIFORM Capacity	OVERALL SIZE (W x D x H)	CASTER SIZE	NET WT. (POUND)
APPL-500®	Turn Handle	24" x 3¾"	500 lb.	24" x 12" x 59½"	8"	44
APPL-1200-60®	Ratchet	24" x 5¼"	1,200 lb.	24" x 15" x 60"	8"*	94
APPL-1200-66®	Ratchet	24" x 5¼"	1,200 lb.	24" x 15" x 66"	8"*	105
APPL-1200-72®	Ratchet	24" x 5¼"	1,200 lb.	24" x 15" x 72"	8"*	125
APPL-500-Y®	Ratchet	24" x 4¾"	500 lb.	24" x 12" x 60"	6"	44

*ALSO INCLUDES (2) 4" x 1" MOLD-ON-RUBBER SWIVEL REAR CASTERS

Arctic Grip Hand Truck

This Arctic Grip Hand Truck is a unique steel hand truck with special handle for use in cold weather. The handle is coated with LINE-X (R) insulating material for more comfort when using with bare hands in cold-weather environments. The frame sides include wheel guards for use with bulky and flexible items and the upright includes nylon net for use with smaller boxes and packages. The hand truck comes with solid rubber shock-absorbing wheels that will never go flat. Welded steel construction with a powder coat black finish.

MODEL	NOSE PLATE	OVERALL SIZE	UNIFORM	WHEEL	NET WT.
NUMBER	(W x D)	(W x H)	Capacity	STYLE	(POUND)
SPHT-AG	19" x 8½"	19" x 20" x 49"	660 lb.	RUBBER	94

8 Hours to Ship

model SPHT-AG

model APPL-500

Moving Pad for Hand Trucks

Minimize scratches and damage to your belongings. Durable yet attractive pads fit most hand trucks with nose plate up to 14" wide. Two (2) self-fastening wraps and one (1) self-fastening nose wrap. Easy to install.

MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x H)	NET WT. (POUND)
QPC-HT®	MOVING PAD FOR HAND TRUCK	16" x 55"	2



CASTERS MAY NOT BE

J22

The Aluminum & Steel Convertible Hand Trucks are versatile wonders. These hand trucks can work in both the vertical and horizontal positions. The task of transporting smaller crates or long narrow boxes is now simplified. These carts roll smoothly on 10" x 3½" rigid pneumatic and 4" x 1" swivel solid rubber casters. Ships knockdown, assembly required.



	MODEL		NOSE PLATE	UNIFORM	OVERALL SIZE	NET WT.
	NUMBER	DESCRIPTION	(W x D)	CAPACITY	(W x D x H)	(POUND)
HAND TRUCK	CAHT-500®	ALUMINUM	18" x 7¼"	500 lb.	20½" x 18 ⁷ /8" x 51½"	42 (UPS)
PLATFORM TRUCK				650 lb.	20½" x 46½" x 40½"	
HAND TRUCK	DSHT-500-PN®	STEEL	13¾" x 7½"	500 lb.	22" x 19" x 49"	31 (UPS)
PLATFORM TRUCK				500 lb.	22" x 42" x 36"	
HAND TRUCK	CSHT-500®	STEEL	10¼" x 7½"	500 lb.	19½" x 20" x 57¾"	76
PLATFORM TRUCK				750 lb.	19½" x 42" x 37"	

High Back Aluminum Hand Truck with Push Out

The High Back Aluminum Hand Truck with Push Out will transport tall heavy loads weighing up to 300 pounds from workstation to workstation. When the load has reached its final destination, the user simply pushes down on the back plate with their foot and the plate on the front of the unit will slide the load off. This feature reduces stress on the user's back. 8" x 1¾" pneumatic wheels. Ships knockdown.

MODEL	NOSE PLATE	UNIFORM	OVERALL SIZE	NET WT.
NUMBER	(W x D)	Capacity	(W x D x H)	(POUND)
HBST-500®	13½" x 7¼"	300 lb.	18" x 17" x 55"	17

Aluminum Ergonomic Hand Truck

Heavy-duty construction, yet lightweight aluminum design provides superior control. This unit has knuckle guard handles, fold up nose plate, and curved back plate for transporting cylindrical objects. Transporting down stairs or steep hills is no problem with this unit. 10" x 3¹/₂" pneumatic wheels are standard. Ships knockdown.

MODEL	NOSE PLATE	UNIFORM	OVERALL SIZE	NET WT.
NUMBER	(W x D)	Capacity	(W x D x H)	(POUND)
AMPC-500®	11" x 11"	350 lb.	21" x 25" x 57½"	23

Steel Stair Hand Truck

Unique design features tandem triple-wheel assemblies that work great when going up and down stairs. Wheel assembly smoothly rotates as you go up or down each step - eliminates the thud and bump associated with conventional two wheel hand trucks on stairs. Rear wheel assembly also allows hand truck to roll easily on four (4) wheels while on flat surfaces. Single loop handle. Steel construction.

MODEL	NOSE PLATE	UNIFORM	OVERALL SIZE	NET WT.
NUMBER	(W x D)	Capacity	(W x D x H)	(POUND)
ST-TRUCK-300®	14½" x 14"	300 lb.	24" x 32" x 45¾"	39

Stair Hand Truck (Four Handles)

Quick and easy way for two people to transport a loaded hand truck up and down stairways or hills. Easy grip handles provide comfort to persons using this hand truck. Removable handles conveniently store on back of hand truck when not in use. Steel construction. $10" \ge 3\frac{1}{2}"$ pneumatic wheels.

MODEL	NOSE PLATE	UNIFORM	OVERALL SIZE	NET WT.
NUMBER	(W x D)	Capacity	(W x D x H)	(POUND)
HAND-TPE	13¾" x 6½"	500 lb.	21" x 17½" x 44½"	36





model HAND-TPE



File Cabinet Hand Truck

Transport file cabinets safely and easily with the File Cabinet Hand Truck. This unique design allows a single person to move file cabinets from one destination to another. The spring-loaded stabilizing arm extends 33" and the back adjusts with tension screws up to 56". This allows the operator to transport a variety of cabinet sizes. Rolls on rubber wheels.

MODE	_	RETRACTED SIZE	EXTENDED SIZE	UNIFORM	NET WT.
NUMBE		(W x D x H)	(W x D x H)	Capacity	(POUND)
FCHT-34	Ļ	19 ⁹ /16" x 13¼" x 36¾"	19 ⁹ /16" x 13¼" x 61¾"	600 lb.	34

Multi-Function Luggage Cart/Chair

The Multi-Function Luggage Cart/Chair is constructed of both steel and plastic. Cart will handle lightweight uniform loads up to 65 pounds. The chair position holds up to 225 uniform pounds. This Cart/Chair is perfect for use at trade shows for transporting products, literature, and small parts. Two (2) 3" x ¾" hard rubber wheels are standard.

MODEL	FOLDED SIZE	SEAT SIZE	LUGGAGE	CHAIR/LUGGAGE	NET WT.
NUMBER	(W x L x H)	(W x L x H)	LIP (W x L)	Uniform capacity	(POUND)
LC-803®	13" x 26½" x 3½"	12" x 13" x 17"	9" x 12"	225 / 65 lb.	

Nesting Slim Trucks

Slim cart with six wheels and narrow platform allows the operator to maneuver through doorways and aisles. Ideal for transporting and stocking small packages in warehouses, shopping malls, grocery stores, post offices, and schools. Plastic platform with steel uprights. Rolls smoothly, quietly on four (4) swivel and two (2) rigid heavy duty non-marking low noise wheels with high quality ball bearings. Perfect for use in noise sensitive environments. Non-marking bumpers on front and rear end. Painted finish.

MODEL NUMBER	USABLE SIZE (W x L x H)	OVERALL SIZE (W x L x H)	UNIFORM Static capacity	NET WT. (POUND)
SNC-1650	44" x 16½" x 53"	50½" x 16½" x 63"	700 lb.	75
SNC-SLF	421⁄2" x 13⁵/8"	461/2" x 13 ⁷ /8" x 21/4"	200 lb.	11
360° ROTATING U	-BOLT SLIM TRUCK			
UST-1748	45" x 17½" x 50½"	50½" x 17½" x 59"	1,100 lb.	62
UST-SLF	44" x 13¼"	48" x 14" x 2½"	200 lb.	11

ADDITIONAL SHELF SUFFIX "SLF"

Model HIGH-T model LUG-C Model LUG-C

High End Platform Truck

This 1,300 pound capacity truck turns conveniently on two (2) 8" poly-on-steel center wheels and is stabilized by four (4) 4" poly swivel casters. The combined six (6) caster design and narrow platform allows the operator to maneuver through doorways and aisles. Ideal for transporting and stocking small packages in warehouses, shopping malls, grocery stores, post offices, and schools. Steel platform construction with steel uprights. Ships knockdown. Powder coat finish.

MODEL	DECK SIZE	OVERALL	UNIFORM	CASTER	NET WT.
NUMBER	(W x L)	HEIGHT	Capacity	TYPE	(POUND)
HIGH-T®	16¼" x 60"	63"	1,300 lb.	POLY-ON-STEEL	

Luggage Cart & Deluxe Platform Truck

These durable and attractive platform trucks are built for function and style. Great for hotels, stores, and other commercial applications. Carpeted platform to prevent scratching of delicate items. Units roll smoothly with poly-on-poly casters.

MODEL NUMBER	DECK SIZE (W x L x H)	UNIFORM STATIC Capacity	OVERALL Height	NET WT. (POUND)
LUG-C®	25¾" x 49" x 11¼"	600 lb.	72"	159
DELUXE-C®	25¾" x 49½" x 8½"	600 lb.	36 ³ /8"	123

model DELUXE-C

Industrial Casters							
MODEL	CASTER	OVERALL	TOP PLATE		UNIFORM	NET WT.	
NUMBER	SIZE	HEIGHT	SIZE	STYLE	CAPACITY	(POUND)	
MOLD-ON-RUBBER							
MR-4/2-S®	4" x 2"	5½"	4" x 4½"	SWIVEL	350 lb.	6	
MR-4/2-R®	4" x 2"	5½"	4" x 4½"	RIGID	350 lb.	6	
MR-4/2-SWB®	4" x 2"	5½"	4" x 4½"	SWIVEL (WITH BRAKE)	350 lb.	6	
MR-6/2-S®	6" x 2"	7½"	4" x 4½"	SWIVEL	450 lb.	8	
MR-6/2-R®	6" x 2"	7½"	4" x 4½"	RIGID	450 lb.	7	
MR-8/2-S®	8" x 2"	91⁄2"	4" x 4½"	SWIVEL	500 lb.	10	
MR-8/2-R®	8" x 2"	91⁄2"	4" x 4½"	RIGID	500 lb.	10	
POLY-ON-STEEL							
PU-5/2-S®	5" x 2"	6½"	4" x 4½"	SWIVEL	1200 lb.	7	
PU-5/2-R®	5" x 2"	6½"	4" x 4½"	RIGID	1200 lb.	6	
PU-5/2-SWB®	5" x 2"	6½"	4" x 4½"	SWIVEL (WITH BRAKE)	1200 lb.	7	
PU-6/2-S®	6" x 2"	7½"	4" x 4½"	SWIVEL	1200 lb.	8	
PU-6/2-R®	6" x 2"	7½"	4" x 4½"	RIGID	1200 lb.	8	
PU-8/2-S®	8" x 2"	91⁄2"	4" x 4½"	SWIVEL	1250 lb.	11	
PU-8/2-R®	8" x 2"	91⁄2"	4" x 4½"	RIGID	1250 lb.	10	
PU-8/2-SWB®	8" x 2"	9½"	4" x 4½"	SWIVEL (WITH BRAKE)	1250 lb.	11	
STEEL				,			
SS-5/2-S⊛	5" x 2"	6½"	4" x 4½"	SWIVEL	1000 lb.	11	
SS-5/2-R®	5" x 2"	6½"	4" x 4½"	RIGID	1000 lb.	11	
SS-6/2-S®	6" x 2"	7½"	4" x 4½"	SWIVEL	1200 lb.	12	
SS-6/2-R®	6" x 2"	7½"	4" x 4½"	RIGID	1200 lb.	12	
SS-8/2-S®	8" x 2"	9½"	4" x 4½"	SWIVEL	1250 lb.	11	
SS-8/2-R®	8" x 2"	91⁄2"	4" x 4½"	RIGID	1250 lb.	11	
GLASS-FILLED NYLON							
GFN-4/2-S℗	4" x 2"	5½"	4" x 4½"	SWIVEL	800 lb.	6	
GFN-4/2-R℗	4" x 2"	5½"	4" x 4½"	RIGID	800 lb.	5	
GFN-4/2-S-SWBଡ	4" x 2"	5½"	4" x 4½"	SWIVEL (WITH BRAKE)	800 lb.	5	
GFN-6/2-S℗	6" x 2"	71⁄2"	4" x 4½"	SWIVEL	1200 lb.	8	
GFN-6/2-R℗	6" x 2"	71⁄2"	4" x 4½"	RIGID	1200 lb.	5	
GFN-6/2-S-SWB	6" x 2"	71⁄2"	4" x 4½"	SWIVEL (WITH BRAKE)	1200 lb.	8	
GFN-8/2-S®	8" x 2"	91⁄2"	4" x 4½"	SWIVEL	1250 lb.	6	
GFN-8/2-R®	8" x 2"	91⁄2"	4" x 4½"	RIGID	1250 lb.	7	
GFN-8/2-S-SWB☉	8" x 2"	91⁄2"	4" x 4½"	SWIVEL (WITH BRAKE)	1250 lb.	7	
GFN-8/2-S-4PSL®	8" x 2"	9½"	4" x 4½"	SWIVEL (W/4 POSITION LOCK)	1250 lb.	6	
GFN-8/2-S-TTL®	8" x 2"	9½"	4" x 4½"	SWIVEL (WITH TOTAL LOCK)	1250 lb.	7	
PHENOLIC							
PH-F-8/3-S®	8" x 3"	10½"	4½" x 6¼"	SWIVEL	2500 lb.	17	
PH-F-8/3-R	8" x 3"	10½"	4½" x 6¼"	RIGID	2500 lb.		
PH-F-8/3-S-4PSL®	8" x 3"	10½"	4½" x 6¼"	SWIVEL (W/4 POSITION LOCK)	2500 lb.	18	
HARD RUBBER							
HR-3/1.25-S℗	3" x 1¼"	3¾"	3 ¹ /8" x 4 ¹ /8"	SWIVEL	275 lb.	2	
HR-4/1.25-S⊛	4" x 1¼"	41⁄2"	3 ¹ /8" x 4 ¹ /8"	SWIVEL	300 lb.	3	
POLY-ON-POLY							
PP-4-1.25-S℗	4" x 1¼"	5½"	2¾" x 3¾"	SWIVEL	300 lb.	3	
PP-4-1.25-R®	4" x 1¼"	5½"	2¾" x 3¾"	RIGID	300 lb.	2	
PP-4-1.25-TTL®	4" x 1¼"	5½"	2¾" x 3¾"	SWIVEL (WITH TOTAL LOCK)	300 lb.	3	
URETHANE SOLID FOAM	WHEELS						
UFBK-10-WHL-58®	10" HIGH	WITH 5/8"	BEARING	BLACK	300 lb.	4	
UFRD-10-WHL-58®			BEARING	RED	300 lb.	4	
UFYL-10-WHL-58®	10" HIGH	WITH 5/8"	BEARING	YELLOW	300 lb.	4	
UFBL-10-WHL-58®	10" HIGH	WITH 5/8"	BEARING	BLUE	300 lb.	4	

Shock-Absorbing Wheels

The special design for shock absorption properties prevents wheels from bouncing like standard pneumatic wheels. Ideal for transporting loads down stairs. Solid black molded rubber tread will never go flat. Steel hubs for maximum strength. Precision bearings with 5%" inside diameter.

MODEL NUMBER	DIAMETER	HUB STYLE	UNIFORM STATIC Capacity	NET WT. (POUND)
SAW-10	10"	OFFSET - FOR HAND TRUCKS	330 lb.	6
SAW-16	16"	SYMMETRIC - FOR WHEEL BARREL	330 lb.	14

INDUSTRIAL/COMMERCIAL CARTS & DOLLIES



STEEL

MOLD-ON-RUBBER

POLY-ON-STEEL











POLY-ON-POLY




URETHANE SOLID FOAM

48 Hours







Manual Trailer Movers

Perfect for boat utility, cargo, jet ski, or other small trailers. Adjustable width wheels from 271/2" to 341/2" for improved stability. Large 16" x 31/2" foam filled wheels allow for smooth maneuverability. Model MTM-1000-WHL features a 8" x 2" stabilizing caster. Handle height is 16¹/₂" and features a comfortable grip for operation. Heavy duty tubular steel construction with blue powder coat finish.

MODEL NUMBER	WHEEL Description	BALL SERVICE	UNIFORM TONGUE Lift capacity	NET WT. (POUND)
MTM-1000	DUAL 16"	19" to 27"	1,000 lb.	109
MTM-1000-WHL	3 WHEELS	19" to 27"	1,000 lb.	119



Gas Powered Trailer Mover

Gas Power Trailer Mover is compact in size and easy to use. They are highly maneuverable, making them ideal for turning in tight spaces (not recommended for use on an incline or slope). Six horsepower gasoline engine combined with a hydrostatic transmission provides variable speed control and generous low speed torque for precise positioning. Rugged front foam filled tires with aggressive tread pattern provide service on unpaved surfaces. Engine powered lift eliminates hand jacking. Three size ball hitch quickly converts to common sizes. Ball sizes; 17/8", 2", and $2^{5/16}$ ". Overall size with handle up is $51^{\circ}W \ge 66^{\circ}L \ge 40^{\circ}H$.

MODEL	BALL	UNIFORM PULL	UNIFORM TONGUE	NET WT.
NUMBER	Service	Capacity	LIFT CAPACITY	(POUND)
PTM-GPT	17" to 27"	12,000 lbs.	1,000 lb.	817



model PTM-GPT

model

MTM-1000-WHL





model PMM-1000 shown with optional PMM-HYD-LIFT





Power Move Masters 24V DC POWERED STANDARD

Power Move Masters are compact in size and easy to use. They are highly maneuverable, making them ideal for turning in tight spaces (not recommended for use on an incline or slope). DC powered for smooth, quiet operation with variable speed control for generous low speed torque and precise positioning. Built in battery charger for quick recovery. In addition, their ergonomic design provides stability and simple control. A variety of hitch attachments along with other options are available, contact factory. The tire size is $9\frac{1}{2}$ " x 18". The hydraulic lift is standard on models PMM-3000 and PMM-3000-15, 9" to 29". Optional hydraulic lift option available on model PMM-1000. Three point mounting configurations allow for adjustable service range.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM Tongue-weight load From lift (lbs.)	UNIFORM MAXIMUM PULL WEIGHT	NET WT. (POUND)
PMM-1000	38" x 53" x 38"	1,000	12,000 lb.	850
PMM-3000	36" x 78" x 43"	3,000	40,000 lb.	2000
PMM-3000-15	36" x 96" x 43"	3,000/1,500*	40,000 lb.	2140
PMM-HYD-LIFT	HYDRAULIC LIFT OPTION, 9" TO 26" ADJUSTABLE			150

*3,000 lb. CENTER / 1,500 lb. FRONT LIFT



INDUSTRIAL/COMMERCIAL CARTS & DOLLIES

Fifth Wheel Towable Trailers

Fifth Wheel Towable Trailers are engineered for power towing. Units come standard with drop forged loop handle and 14" square fifth wheel, which features low friction wear pad and 1¼" precision thrust bearing. Pintle hitch welded to rear of trailer for towing multiple trailers, as well as other custom deck sizes and hardwood decks available

MODEL NUMBER	PLATFORM SIZE (W x L x H)	GAUGE OF DECK	UNIFORM Capacity	*CASTER Type	NET WT. (POUND)
FWST-36-4P	36" x 72" x 24"	12	5,000 lb.	12" POLY	375
FWST-36-4PNU	36" x 72" x 19"	12	4,500 lb.	16" PNU	375
FWST-48-4P	48" x 96" x 24"	7	5,000 lb.	12" POLY	480
FWST-48-4PNU	48" x 96" x 19"	7	4,500 lb.	16" PNU	480
FWST-48-10P	48" x 96" x 21½"	7	10,000 lb.	12" POLY	850
FWST-48-10PNU	48" x 96" x 24"	7	10,000 lb.	16" S PNU	850
FWST-512-10P	60" x 144" x 21½"	7	10,000 lb.	12" POLY	1200
FWST-512-10PNU	60" x 144" x 24"	7	10,000 lb.	16" S PNU	1200

*POLY = POLYURETHANE / PNU = PNEUMATIC / S PNU = SOLID PNEUMATIC

Caster Towable Trailers

Caster Towable Trailers are engineered for power towing. Units are standard with heavy duty couplers and swivel casters drop-forged steel construction with integrally forged kingpin and precision thrust bearing. Standard running gear are 10" x 3" in the front and 12" x 3" load wheels in the back (to make it easier to maneuver). Handle is 26" high above deck and channel reinforced pipe sockets at swivel end.

MODEL NUMBER	PLATFORM SIZE (W x L x H)	CASTER Type	UNIFORM Capacity	NET WT. (POUND)
CST-36-4MR	36" x 72" x 15 ³ /4"	MOLD-ON-RUBBER	3,000 lb.	425
CST-36-4P	36" x 72" x 15 ³ /4"	POLYURETHANE	4,000 lb.	425
CST-48-4MR	48" x 96" x 15 ³ /4"	MOLD-ON-RUBBER	3,000 lb.	595
CST-48-4P	48" x 96" x 15 ³ /4"	POLYURETHANE	4,000 lb.	595

Powered Platform Truck DC POWERED STANDARD

High quality battery-powered truck is ideal for transporting all sorts of loads in warehouses, hospitals, and factories. Red throttle controls infinite speed in forward or reverse and unit stops when throttle is released. Emergency reverse belly switch; when actuated, instantly reverses direction and moves the unit forward away from the operator until the switch is released. Stable 4 wheel platform. Two (2) 10" pneumatic tires and two (2) 5" poly on steel swivel wheels provide a high degree of maneuverability. Features an anti-slip rugged deck surface. Maximum speed is 1.8 mph loaded and 2.3 mph unloaded. This truck comes with two (2), 12V, 40Ah maintenance free batteries, 70A Curtis controller, 370W drive motor, integral battery charger, and battery level gauge. 3-4 hour operation at full charge - 6 hours when used intermittently. Battery recharge time is 8-8.5 hours.

MODEL	DECK SIZE	DECK	OVERALL SIZE	UNIFORM STATIC	NET WT.
NUMBER	(W x L)	HEIGHT	(W x L x H)	Capacity	(POUND)
VPPT	36" x 43"	12 ³ /8"	36¼" x 50" x 42½	1,000 lb.	289

Electric Material Handling Cart DC POWERED STANDARD

Transport a large array of products throughout your warehouse efficiently with this motorized cart. Features a heavy duty 650 watt motor, two (2) 40 amp batteries, 5 amp-hour on-board battery charger, LED battery level gauge, horn/power kill button, intelligent electronic braking, variable speed dial, and a Penny & Giles motor controller. Unit operates smoothly with fingertip forward and reverse levers and 10" foam filled drive tires. Pinpoint turning is accurate with the mid axle drive feature. Maximum speed is 4.8 mph.

MODEL	DECK SIZE	DECK	UNIFORM STATIC	NET WT.
NUMBER	(W x L)	HEIGHT	Capacity	(POUND)
EMHC-2460®	24" x 60"	11²/3"	1,100 lb.	319



model CST-36-4P





model NE-CART-1

J28



















model OROAD-400





CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

Traction-Drive Carts DC POWERED STANDARD

Unique carts feature built-in traction-drive system for easy transportability. Ideal for applications including mail rooms, hospitals, supermarkets, hotels, and warehouses. Features 450W electric drive motor with two (2) 70Ah batteries for power. 110V AC internal battery charger is included along with battery level indicator. Variable speed throttle control for precise maneuvering and positioning is located in the handle. Units roll smoothly on two (2) 9" x 3¹/₄" solid foam rubber steering wheels and two (2) 10" x 3¹/₄" solid foam drive wheels. Walking speed is 0-2.8 mph when unloaded and 0-1.5 mph when loaded. Speed control is conveniently located in handle. Handle pivots back towards operator and includes horn and emergency stop. Maximum incline is 7 degrees. Each shelf includes a tread plate surface.

MODEL NUMBER	PLATFORM Size (W x L)	OVERALL SIZE (W x L x H)	NUMBER OF Shelves	UNIFORM STATIC Capacity	NET WT. (POUND)
NE-CART-1	28" x 48"	28" x 59" x 44"	1	750 lb.	526
NE-CART-2	24¾" x 46"	28" x 59" x 44"	1	750 lb.	586
NE-CART-3	24¼" x 46"	28" x 59" x 44"	2	750 lb.	598
NE-CART-4	24¾" x 46"	28" x 59" x 59"	3	750 lb.	610



Off-Road Traction Drive Powered Carts 24V DC POWERED STANDARD

Ideal on the farm or in the factory. Features a robust 24V DC 600 watt drive motor, two (2) 12 volt batteries with charger and level gauge, low/high speed, LED headlights, wire storage, basket, and forward/reverse. Low speed is 11/2 m.p.h. High speed is 17/8 m.p.h. (reverse is 11/2 m.p.h.). Unit runs for approximately 4 hours before it needs charged. Climb a 13° incline easily with 400 pounds or less. Side guards are removable. Overall size 331/2"W x 72"L x 373/4"H.

MODEL NUMBER	DECK SIZE (W x L x H)	UNIFORM STATIC Capacity	WHEEL SIZE	NET WT. (POUND)
OROAD-400®	31½" x 52½" x 15¾"	500 lb. rough 600 lb. smooth	3½" x 11" rear 6" x 14" front	395
OROAD-400-T®	33¾" x 52¾" x 17"	500 lb. rough 600 lb. smooth	3½" x 11" rear 6" x 14" front	395

Aluminum and Steel Plate Dollies

Plate Dollies are manufactured with a 3%" thick raised diamond pattern aluminum or steel tread plate. A smooth deck is available upon request. Dollies are approximately 6" high and include 4" x 2" mold-on-rubber casters, two (2) rigid and two (2) swivel with brake bolted onto the dollies (suffix -AS features four (4) swivel casters with locks). The steel unit has a powder coat blue finish. Optional pull strap or hook is available separately, see page J-31.

MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC Capacity	CASTER SIZE	DECK HEIGHT	NET WT. (POUND)	
ALUMINUM PLATE DOLLIE	S					
VPLDO/A-1418	14" x 18"	1,200 lb.	4" x 2"	6"	37	
VPLDO/A-1824	18" x 24"	1,200 lb.	4" x 2"	6"	43	
VPLDO/A-2430	24" x 30"	1,200 lb.	4" x 2"	6"	47	
VPLDO/A-1418-AS	14" x 18"	1,200 lb.	4" x 2"	6"	37	
VPLDO/A-1824-AS	18" x 24"	1,200 lb.	4" x 2"	6"	43	
VPLDO/A-2430-AS	24" x 30"	1,200 lb.	4" x 2"	6"	47	
STEEL PLATE DOLLIES						
VPLDO/S-1418	14" x 18"	1,200 lb.	4" x 2"	6"	51	
VPLDO/S-1824	18" x 24"	1,200 lb.	4" x 2"	6"	73	
VPLDO/S-2430	24" x 30"	1,200 lb.	4" x 2"	6"	149	
VPLDO/S-1418-AS	14" x 18"	1,200 lb.	4" x 2"	6"	51	
VPLDO/S-1824-AS	18" x 24"	1,200 lb.	4" x 2"	6"	73	
VPLDO/S-2430-AS	24" x 30"	1,200 lb.	4" x 2"	6"	149	
SUFFIX -AS FEATURES FOUR (4) SWIVEL CASTERS WITH LOCKS						

Aluminum Plate Dollies with Handles

The Aluminum Plate Dollies with Handles are ideal for the shipping and distribution facilities. The construction is manufactured from heavy-duty raised diamond tread plate for strength and extra grip. Casters are available in steel or rubber construction for smooth rolling. Products with the suffix "H" include an additional handle for easy transporting when dolly is empty.

MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC Capacity	CASTER TYPE	ADDITIONAL Handle	NET WT. (POUND)
PDA-1627-C-S	16" x 27"	2,800 lb.	STEEL	NO	48
PDA-2436-C-S	24" x 36"	2,800 lb.	STEEL	NO	56
PDA-1627-R-S	16" x 27"	1,200 lb.	RUBBER	NO	48
PDA-2436-R-S	24" x 36"	1,200 lb.	RUBBER	NO	56
PDA-1627-C-S-H	16" x 27"	2,800 lb.	STEEL	YES	48
PDA-2436-C-S-H	24" x 36"	2,800 lb.	STEEL	YES	56
PDA-1627-R-S-H	16" x 27"	1,200 lb.	RUBBER	YES	48
PDA-2436-R-S-H	24" x 36"	1,200 lb.	RUBBER	YES	56

Aluminum Pallet Dollies

Designed to transport pallets with ease. All welded aluminum construction is durable, yet lightweight. Features heavy-duty 3" wide x 3¹/₂" diameter phenolic rollers for easy portability. Choose from either tilt or non-tilt styles. Tilt style allows for easier turning than. Optional loops/handle and a center support crossbar are available. Dolly height is 41/4".

MODEL NUMBER	OVERALL SIZE (W x L)	UNIFORM Static capacity	NUMBER OF Rollers	DECK HEIGHT	NET WT. (POUND)
DOL-3636-6NT*	36" x 36"	4,000 lb.	6	NON-TILT	32
DOL-3642-6NT	36" x 42"	4,000 lb.	6	NON-TILT	33
DOL-3648-6NT	36" x 48"	4,000 lb.	6	NON-TILT	44
DOL-4048-6NT	40" x 48"	4,000 lb.	6	NON-TILT	73
DOL-4242-6NT	42" x 42"	4,000 lb.	6	NON-TILT	71
DOL-4248-6NT	42" x 48"	4,000 lb.	6	NON-TILT	80
DOL-4848-6NT	48" x 48"	4,000 lb.	6	NON-TILT	85
DOL-4848-8NT	48" x 48"	6,000 lb.	8	NON-TILT	91
DOL-4848-10NT	48" x 48"	8,000 lb.	10	NON-TILT	97
DOL-3636-6T*	36" x 36"	4,000 lb.	6	TILT	32
DOL-3642-6T	36" x 42"	4,000 lb.	6	TILT	33
DOL-3648-6T	36" x 48"	4,000 lb.	6	TILT	44
DOL-4048-6T	40" x 48"	4,000 lb.	6	TILT	73
DOL-4242-6T	42" x 42"	4,000 lb.	6	TILT	71
DOL-4248-6T	42" x 48"	4,000 lb.	6	TILT	80
DOL-4848-6T	48" x 48"	4,000 lb.	6	TILT	85
DOL-3636-8T*	36" x 36"	6,000 lb.	8	TILT	38
DOL-3642-8T	36" x 42"	6,000 lb.	8	TILT	39
DOL-3648-8T _☉	36" x 48"	6,000 lb.	8	TILT	40
DOL-4048-8T _☉	40" x 48"	6,000 lb.	8	TILT	79
DOL-4242-8T	42" x 42"	6,000 lb.	8	TILT	77
DOL-4848-8T _☉	48" x 48"	6,000 lb.	8	TILT	91
DOL-3636-10T*	36" x 36"	8,000 lb.	10	TILT	44
DOL-3642-10T	36" x 42"	8,000 lb.	10	TILT	45
DOL-3648-10T	36" x 48"	8,000 lb.	10	TILT	46
DOL-4048-10T	40" x 48"	8,000 lb.	10	TILT	85
DOL-4242-10T	42" x 42"	8,000 lb.	10	TILT	83
DOL-4848-10T	48" x 48"	8,000 lb.	10	TILT	97
OPTIONS					
DOL-FL-LK		(FACTORY INSTALLE	D)		2
DOL-HDL	LOOPS AND				2
DOL-CB	CENTER SUP	PPORT CROSS B	AR (FACTORY IN:	STALLED)	10

*FLOOR LOCK NOT AVAILABLE

Adjustable Tote Dollies

Unique design is adjustable in both width and length for use with different size totes. Easy to adjust by loosening the screws and sliding each side in or out. Each unit includes four (4) swivel casters (two with brake) that are attached with caster pads. Overall size is 3" greater than the usable size. Welded steel construction for maximum strength with powder coat blue finish. Totes sold separately.

MODEL NUMBER	MINIMUM USABLE SIZE	MAXIMUM USABLE SIZE	UNIFORM STATIC Capacity	CASTER SIZE / STYLE	NET WT. (POUND)
ATD-1622-4®	16"W x 22"L	24"W x 34"L	2,000 lb.	4" GFN*	40
ATD-1622-6®	16"W x 22"L	24"W x 34"L	3,000 lb.	6" GFN*	43
*GLASS-FILLED NYL	.ON				









Tilt style allows for spinning on center line axis.





model ATD-1622-4

J29

900 LB.

CAPACITY UNITS



CAPACITY UNITS





model PRM-4048





model NPL-21





Aluminum Channel Dollies

These versatile dollies are manufactured from aluminum for a strong, yet lightweight design. Aluminum construction will not rust and never needs painting. Each dolly includes four (4) swivel casters for maximum maneuverability. Order with optional Pull Strap or Hook for added operator convenience - see page J-31.

MODEL NUMBER	OVERALL SIZE (W x L)	UNIFORM Capacity	DECK HEIGHT	CASTER SIZE	CASTER Type*	NET WT. (POUND)
ACP-1824-9®	18" x 24"	900 lb.	6"	3" x 1¼"	HR	16
ACP-2130-9®	21" x 30"	900 lb.	6"	3" x 1¼"	HR	17
ACP-2136-20®	21" x 36"	2,000 lb.	10 ⁵ /8"	5" x 2"	POLY	58
ACP-2436-20®	24" x 36"	2,000 lb.	10 ⁵ /8"	5" x 2"	POLY	61
ACP-2442-20®	24" x 42"	2,000 lb.	10 ⁵ /8"	5" x 2"	POLY	64
ACP-4042-20®	40" x 42"	2,000 lb.	105/8"	5" x 2"	POLY	73

*HR = HARD RUBBER / POLY = POLY-ON-STEEL

Steel Pro-Movers

Move pallets without a fork truck or pallet jack. Designed for holding standard wooden pallets. Transport pallets and skids with these open frame all welded steel dollies. 2,000 lb. capacity units roll smoothly on four (4) swivel mold-on-rubber casters. 4,000 lb. capacity units feature glass-filled-nylon swivel casters. Casters are bolted to each dolly. Blue powder coat finish.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
PRM-4048	40" x 48"	87/8"	2,000 lb.	6" x 2"	115
PRM-4248	42" x 48"	87/8"	2,000 lb.	6" x 2"	120
PRM-4848	48" x 48"	87/8"	2,000 lb.	6" x 2"	121
PRM-4048-8	40" x 48"	11"	4,000 lb.	8" x 2"	108
PRM-4248-8	42" x 48"	11"	4,000 lb.	8" x 2"	119
PRM-4848-8	48" x 48"	11"	4,000 lb.	8" x 2"	121

Lo-Profile Floor Hugger Dolly

This lo-profile steel dolly allows for loading and unloading of materials at floor level. The four (4) $3" \ge 14$ " hard rubber swivel casters allow for easy portability. The handles allow for convenient positioning and transporting. The overall height is 43%".

MODEL	OVERALL SIZE	USABLE SIZE	UNIFORM STATIC	NET WT.
NUMBER	(W x L x H)	(W x L x H)	Capacity	(POUND)
LFH-55®	31" x 22" x 4 ³ /8"	21" x 21½" x 2"	840 lb.	72

Nose Plate Dollies

These lever action dollies are excellent for moving file cabinets, appliances, drums, crates, and cartons. Heavy-duty steel dolly is designed to be counterbalanced so you do not need to lift the entire weight of the load. Simply tilt the load and slide dolly under. Complete product is vinyl covered to help eliminate scrapes and scratches. Equipped with hard rubber wheels, two (2) $3" \times 1\frac{1}{2}"$ axle mounted and two (2) $2\frac{1}{2}" \times 1\frac{1}{4}"$ swivel casters.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	NET WT. (POUND)
NPL-21®	15" x 32"	4"	600 lb.	20
NPL-24®	18" x 32"	4"	600 lb.	23

Fiberwood Dollies

Fiberwood construction dollies feature a rubber padded surface and two hand holes to carry the unit. The PVC edge strip protects walls from scrapes. Units roll on four (4) swivel wheels, which are non-marring and oil-resistant.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER* SIZE / TYPE	NET WT. (POUND)
FWD-1824-3R®	18" x 24"	5"	800 lb.	3" HR	14
FWD-1836-3R®	18" x 36"	5"	700 lb.	3" HR	20
FWD-2436-3R®	24" x 36"	5"	600 lb.	3" HR	23
FWD-2436-4PP®	24" x 36"	5½"	600 lb.	4" PP	24
*HR = HARD RUBBER / PF	P = POLYPROPYLEN	E CASTERS			



Hardwood Dollies

Open Deck, Solid Deck, Vinyl Covered, Carpet End, Rubber End

Transport boxes, crates, or supplies with these rugged dollies. Units maneuver on four (4) swivel hard rubber casters or non-marking casters. Assembly required.

HARDWOOD DOLLY ACCESSORIES

MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
STRAP-8®	4 FOOT LONG NYLON LOOP PULL STRAP	2
HOOK-8®	4 FOOT LONG METAL HOOK	3

OPEN DECK HARDWOOD DOLLIES

MODEL NUMBER	DECK SIZE (W x L)	DECK Height	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
HDOF-1624-9®	16" x 24"	5½"	900 lb.	3" x 1¼"	18
HDOF-2436-9®	24" x 36"	5½"	900 lb.	3" x 1¼"	24
HDOF-1624-12®	16" x 24"	6¾"	1,200 lb.	4" x 1¼"	20
HDOF-2436-12®	24" x 36"	6¾"	1,200 lb.	4" x 1¼"	26
NON-MARKING CASTERS					
HDOF-1624-9-NM	16" x 24"	5½"	900 lb.	3" x 1¼"	18
HDOF-2436-9-NM	24" x 36"	5½"	900 lb.	3" x 1¼"	24
HDOF-1624-12-NM	16" x 24"	6¾"	1,200 lb.	4" x 1¼"	20
HDOF-2436-12-NM	24" x 36"	6¾"	1,200 lb.	4" x 1¼"	26





series HDOS

series FDOL

series HDOR

SOLID DECK HARDWOOD DOLLIES

OULID DEOK HAID HOOD DO					
MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
HDOS-1624-9®	16" x 24"	5½"	900 lb.	3" x 1¼"	17
HDOS-2436-9®	24" x 36"	5½"	900 lb.	3" x 1¼"	30
HDOS-1624-12®	16" x 24"	6¾"	1,200 lb.	4" x 1¼"	22
HDOS-2436-12®	24" x 36"	6¾"	1,200 lb.	4" x 1¼"	32
NON-MARKING CASTERS					
HDOS-1624-9-NM	16" x 24"	5½"	900 lb.	3" x 1¼"	17
HDOS-2436-9-NM	24" x 36"	5½"	900 lb.	3" x 1¼"	30
HDOS-1624-12-NM	16" x 24"	6¾"	1,200 lb.	4" x 1¼"	22
HDOS-2436-12-NM	24" x 36"	6¾"	1,200 lb.	4" x 1¼"	32

VINYL COVERED HARDWOOD DOLLIES

MODEL NUMBER	DECK SIZE (W x L)	DECK Height	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
FDOL-1624-9®	16" x 24"	5¾"	900 lb.	3" x 1¼"	20
FDOL-2436-9®	24" x 36"	5¾"	900 lb.	3" x 1¼"	30
FDOL-1624-12®	16" x 24"	7"	1,200 lb.	4" x 1¼"	23
FDOL-2436-12®	24" x 36"	7"	1,200 lb.	4" x 1¼"	34
FDOL-2448-12®	24" x 48"	7"	1,200 lb.	4" x 1¼"	41

RUBBER END HARDWOOD DOLLY

MODEL	DECK SIZE	DECK	UNIFORM STATIC	CASTER	NET WT.
NUMBER	(W x L)	Height	Capacity	SIZE	(POUND)
HDOR-1830-12®	18" x 30"	7"	1,200 lb.	4" x 1¼"	17

CARPET HARDWOOD DOLLIES

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
HDOC-1218-9®	12" x 18"	5"	900 lb.	3" x 1¼"	9
HDOC-1624-9®	16" x 24"	5¾"	900 lb.	3" x 1¼"	12
HDOC-1830-9®	18" x 30"	5¾"	900 lb.	3" x 1¼"	14
HDOSC-1624-12	16" x 24"	6¾"	1,200 lb.	4" x 1¼"	34
HDOSC-2436-12	24" x 36"	6¾"	1,200 lb.	4" x 1¼"	39

Dolly Converter

The Dolly Converter is a great addition to the already functional dolly. The upright black handles support off balance and awkward loads, as well as give an ergonomically friendly height to the dolly. The units are sold in pairs and are not pre-drilled. Hardware is included.

MODEL NUMBER	WIDTH	HEIGHT	UNIFORM STATIC Capacity	NET WT. (POUND)
D-CNVR-250®	12"	37"	250 lb.	23





J31

NDUSTRIAL/COMMERCIAL CARTS & DOLLIES





model ACE-1624





These oversized hardwood dollies are great for moving larger items. Manufactured from durable ¾" thick plywood components. Hand hole for carrying the dolly measures 5" x 1½". Units roll on non-marking polyurethane casters. Capacity is 1,200 pounds.

Model HDOS-2448-6SW features six (6) 4" x 1¼" swivel polyurethane casters.

Carpet End Dolly model HDOC-2448-12 feature two (2) rigid 5" x $1\frac{1}{4}$ " and two (2) swivel 4" x $1\frac{1}{4}$ " casters. Carpet ends, which measure 24" x 12" each, offer additional protection. Side boards are 24" L x $3\frac{1}{2}$ "W.

MODEL NUMBER	DESCRIPTION	NET WT. (POUND)		
HDOS-2448-6SW®	HARDWOOD	24" x 48" x 6½"	NON-TILTING	32
HDOC-2448-12®	CARPET END	24" x 48" x 7½"	TILTING	28

Adjustable Carpet End Dolly

Protect materials being moved with our Adjustable Carpet End Dolly. Adjustable length for use in various applications. The dolly has a heavy-duty steel understructure and powder-coat blue finish. Tension thumb screw is used to adjust the length. Height is 6¾". Unit rolls smoothly on four (4) 4" x 1¼" polyurethane-on-polyolefin non-marking swivel casters.

MODEL	OVERALL SIZE	OVERALL SIZE	UNIFORM STATIC	NET WT.
NUMBER	CLOSED (W x L)	OPEN (W x L)	Capacity	(POUND)
ACE-1624®	16" x 24"	16" x 40"	1,200 lb.	22

Plastic Dollies

One piece molded polyethylene dollies are lightweight and easy to clean. Will not rot, warp, dent, or splinter like wood dollies. Ideal for the food service industry. Dollies with pull rope includes 1/4" poly rope handle for easy pulling.

Model POS-1624 features a molded handle. This allows dolly to be easily carried up and down stairs. Unit comes standard with poly-on-poly casters.

Models POS-1830 and POS-2133 roll smoothly on poly-on-poly casters.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STAT- IC CAPACITY	WHEEL SIZE	NET WT. (POUND)
POS-1624®	16" x 24"	41⁄2"	220 lb.	3" x 1"	9
POS-1624-ROPE®	16" x 24"	41⁄2"	220 lb.	3" x 1"	9
POS-1830®	18" x 30"	6"	500 lb.	4" x 1¼"	21
POS-1830-ROPE®	18" x 30"	6"	500 lb.	4" x 1¼"	21
POS-2133®	21" x 33"	6"	500 lb.	4" x 1¼"	25
POS-2133-ROPE®	21" x 33"	6"	500 lb.	4" x 1¼"	25

Plastic Dolly with Handle

Plastic Dolly with Handle is made to move boxes, crates, and office equipment easily. Strong polyethylene construction will not warp or splinter. Rolls smoothly on four (4) polyolefin swivel casters.

MODEL	DECK SIZE	HANDLE	UNIFORM STATIC	WHEEL	NET WT.
NUMBER	(W x L)	HEIGHT	Capacity	SIZE	(POUND)
PDH-1624®	16" x 24"	37¼"	500 lb.	4" x 1½"	22

Plastic Dolly Rubber Ends

Steel reinforced high impact polypropylene construction. Non-porous surface doesn't split, break, rust, or become weak. Rubber pads on dolly prevent slipping.

MODEL	DECK SIZE	DECK	UNIFORM STATIC	WHEEL	NET WT.
NUMBER	(W x L)	HEIGHT	Capacity	SIZE	(POUND)
PDOC-1830®	18" x 30"	5½"	1,000 lb.	3" x 1¼"	14



Hours) to Ship



Interlocking Plastic Dollies

Strong, lightweight dollies include special interlocking edges that allow users to connect multiple dollies together to form a larger platform size. Hand holes are included for convenient carrying, while special pockets in the deck allow for easier stacking. Standard units roll on two (2) swivel and two (2) rigid 4" x 1" polypropylene casters. Model PCS-1626-DLX rolls on four (4) swivel 3" x 1" silent casters. Handle height when installed is 26".

MODEL NUMBER	PLATFORM Size	DECK HEIGHT	UNIFORM Capcity	NET WT. (POUND)
PCS-1626®	16"W x 26"L	6½"	250 lb.	12
PCS-1626-DLX	16"W x 26"L	4¾"	330 lb.	8
PCS-HDL*	OPT	FIONAL STEEL HAND	DLE	9

*FOR USE WITH MODEL PCS-1626 ONLY

Quilted Moving Pads

Cushion and protect furniture, machinery, and electronic equipment. Each pad measures 72" wide by 80" long. Units are sold a dozen at a time. Model QPC-7280-UP is water and mildew resistant.

MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
QPC-7280-DP®	GENERAL DUTY (both sides cotton)	57
QPC-7280-UP®	ALL WEATHER (both sides polyester)	63
QPC-7280-VP®	HEAVY-DUTY (one side polyester/other side cotton)	82

Specialty Dollies

Polyethylene Dollies, *series DOL*, features a steel reinforced structure, which gives the dollies a capacity of 1,000 pounds. Available in a flush top or a padded top.

Rolling Knee Dolly, *model KNEE-D*, is great for people working on their knees. Constructed of red molded plastic with foam cushioned knee cups. Ideal for maintenance departments, automotive garages, and furniture warehouses. Handy tool tray keeps tools in easy reach.

Leg Dolly, *model LEG-D*, Ideal for moving furniture with legs. Includes swivel hard poly casters. Three foam pads on top of dolly help prevent scratching. Inner cup is 1³/₈" in diameter, while the outer cup is 2¹/₄" in diameter. Sold each.

MODEL NUMBER	DECK SIZE (W x L)	DECK HEIGHT	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
DOL-1830-F®	18" x 30"	10"	1,000 lb.	(4) 5"	24
DOL-1830-P®	18" x 30"	10"	1,000 lb.	(4) 5"	29
KNEE-D®	20¼" x 10"	3¾"	350 lb.	(6) 2"	5
LEG-D®	6 ³ /8" x 5¾"	2¼"	200 lb.	(3)1¼"	2
LEG-D-12®	12" x 10¾"	25/8"	300 lb.	(3) 2"	4







model LEG-D

model PCS-1626 shown

with optional handle.

STACKABLE

48 Hours

model PCS-1626

model PCS-1626-DLX

48 Hours

48 Hours with the ship



48 Hours (In Ship



WDF OATED







model VHDD-2436-P



CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES

Low Profile Machinery Dolly

Typically used in pairs or sets of four to move heavy machinery, containers, and other equipment. Deck height is only 1³/₄" high. Made of all welded steel construction with a ¹/₄" thick deck and ⁵/₈" high lip on two sides to retain loads. Four (4) rigid 2" x 1/2" steel wheels allow for portability.

MODEL	DECK SIZE	DECK	UNIFORM STATIC	WHEEL	NET WT.
NUMBER	(W x L)	HEIGHT	Capacity	SIZE	(POUND)
MCD-10®	8½" x 12"	1¾"	10,000 lb.	2" x ½"	16

Steel Dolly Sets

These lightweight steel dollies are ideal for use in hundreds of applications. Each dolly features bolt-on hard rubber swivel casters and a painted finish. V-groove formed deck for strength and slip resistance.

MODEL NUMBER	DECK SIZE (W x L)	DECK Height	UNIFORM STATIC Capacity per set	CASTER Size	QUANTITY Per Box	NET WT. (Pound)
SDOL-2®	8" x 8"	35/8"	500 lb.	2" x ¾"	2	12
SDOL-4®	8" x 8"	35/8"	1,000 lb.	2" x ¾"	4	24

Open Deck Machinery Dollies

Dollies have six high-capacity, abrasion-resistant, cast iron steel wheels on fixed axles to move heavy machinery, containers, and other equipment. The center wheels project lower than end wheels for easier pivoting. Welded steel construction. Model ODMD-2436-6 has a 3" channel steel frame; 5" x 2" cast iron wheels have roller bearings. Model ODMD-3660-10 has a 6" channel (1¾" flange width) steel frame; 8" x 3" cast iron wheels have roller bearings. Durable powder coat yellow finish.

MODEL NUMBER	OVERALL SIZE (W x L x H)	CENTER OPENING (W x L)	UNIFORM STATIC CAPAC- Ity	NET WT. (POUND)
ODMD-2436-6®	24" x 36" x 6 ³ /8"	12½" x 33 ³ /16"	6,000 lb.	149
ODMD-2436-10	24" x 36" x 8¼"	9 ³ /6" x 33 ³ /16"	10,000 lb.	172
ODMD-3048-6	30" x 48" x 6³/8"	18½" x 45 ³ /16"	6,000 lb.	290
ODMD-3048-10	30" x 48" x 8¼"	15 ³ /16" x 45 ³ /16"	10,000 lb.	295
ODMD-3660-6	36" x 60" x 6 ³ /8"	24½" x 56 ³ /16"	6,000 lb.	348
ODMD-3660-10	36" x 60" x 8¼"	21 ³ /16" x 56 ³ /16"	10,000 lb.	358

Heavy-Duty Dollies

Ideal for handling large rolls of paper or other cylindrical objects. Size is 24" wide x 36" long x 163/8" high to bottom of concave. Frame of 6" x 4" x 3/8" steel angle encasing hardwood contact blocks. Four (4) plate steel rigid casters with 8" x 21/2" roller bearing wheels. Balances on two (2)center casters for maneuverability.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM STATIC Capacity	CASTER Size / Style	NET WT. (POUND)
VHDD-2436-M	24" x 36" x 18 ⁷ /8"	4,000 lb.	METAL	275
VHDD-2436-P	24" x 36" x 18 ⁷ /8"	4,000 lb.	PHENOLIC	275

Portable Parts Bin



Cut parts picking time in half with these space saving, rotating Portable Parts Bins. Compact enough to fit in small spaces, such as corners and ends of aisles. Great for organization of small parts. Ideal for use in commercial and industrial applications. Rugged molded plastic construction with four (4) swivel casters for portability. Each shelf is 21/8" deep. The space between the shelves is 8".

MODEL NUMBER	DIAMETER	HEIGHT	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
PBIN-19®	19½"	38½"	220 lb.	3" x ¾"	30

Heavy-Duty Cradle Carts

Move and store pipe, channel, bar stock, barrels, or drums with these Heavy-Duty Cradle Carts. A large open design that makes loading and unloading by fork trucks and slings easy. All welded construction. Wheels are mounted in a diamond pattern to allow the truck to tilt when going over thresholds and turn about on its own center. All units roll on two (2) rigid and two (2) swivel casters with the exception of model DCC-80, which rolls on four (4) swivel casters. The 4,000 pound units feature glass filled nylon casters. The 10,000 pound carts roll on two (2) rigid steel and two (2) swivel glass filled nylon casters.

MODEL NUMBER	OVERALL SIZE (W x L x H)	UNIFORM STATIC Capacity	CASTER SIZE	NET WT. (POUND)
DCC-80*	29" x 29" x 24"	4,000 lb.	6" x 2"	140
DCC-2860-4*	28" x 60" x 29"	4,000 lb.	8" x 2"	230
DCC-2896-4*	28" x 96" x 29"	4,000 lb.	8" x 2"	320
DCC-2860-10*	28" x 60" x 29"	10,000 lb.	8" x 3"	367
DCC-2896-10*	28" x 96" x 29"	10,000 lb.	8" x 3"	550
DCC-28120-10*	28" x 120" x 29"	10,000 lb.	8" x 3"	601
DCC-17**	20" x 20" x 5½"	600 lb.	3" x 1½"	30

*STEEL CONSTRUCTION / **ALUMINUM CONSTRUCTION, HARD RUBBER CASTERS

V-Groove Pipe Movers

Pipe and tubing measuring up to 20 feet long may now be easily moved by one person. The V-Groove design keeps loads at the horizontal center of gravity for maximum stability and safety. Large 16" diameter tires. Includes a 37" long handle for added maneuverability. Steel construction. Unit is powder coated blue.

MODEL NUMBER	SIZE (W x L)	UNIFORM STATIC Capacity	WHEEL STYLES	NET WT. (POUND)
VGP-100®	17" x 30"	600 lb.	PNEUMATIC	76
VGP-100-FF®	17" x 30"	1,000 lb.	FOAM FILLED	80

Portable Carpet Dollies & Dispensers

Portable Carpet Dollies allows for easy movement of long and heavy rolls of carpeting. V-groove platform holds carpet rolls securely in place.

Carpet Dispenser minimize lifting and pulling. Slide carpet onto rollers. Carpet unrolls as needed. Retractable legs stabilize cart.

Each unit includes two (2) 16" diameter by 4" wide wheels. Uniform capacity 500 lbs. Welded steel construction with powder coat blue finish.

MODEL NUMBER	OVERALL SIZE (W x L x H)	PLATFORM Size (W x L)	WHEEL STYLE	NET WT. (LBS.)
CARPET-45®	26" x 61" x 20"	15¹/ଃ" x 61"	FULLY PNEUMATIC	65
CARPET-45-FF®	26" x 61" x 20"	15¹/ଃ" x 61"	FOAM-FILLED	75
CARPET-D®	25" x 61" x 24½"	14 ¹ /16" x 55"	FULLY PNEUMATIC	111
CARPET-D-FF⊙	25" x 61" x 24½"	14 ¹ /16" x 55"	FOAM-FILLED	121

Economical Pallet & Container Transporters

Reduce fork truck dependency by transporting pallets and crates to workstations with our Economical Pallet & Container Transporters. Units feature 8" glass-filled nylon casters for easier mobility. Choose from four different styles. Adjustable height models can only be adjusted when unloaded. Order optional corner guides for extra stability two (2) come standard with model C-ATH-4048. Steel construction. Powder coat finish.

MODEL NUMBER	SERVICE Range	UNIFORM STATIC Capacity	CASTER Size / Style	NET WEIGHT (POUND)
C-ATH-4048	24" TO 32"	4,000 lb.	8" GFN*	196
C-AH-4048	24" TO 32"	4,000 lb.	8" GFN*	191
C-FH-4048	12"	4,000 lb.	8" GFN*	145
C-FC-40	15"	4,000 lb.	8" GFN*	189
CG-12-R	OPTIONAL CO	12		
CG-12-L	OPTIONAL CO	12		
*GLASS-FILLED NYLC	N			



J35

ECONOMY FIXED HEIGHT TRANSPORTER WITH OPTIONAL CORNER GUARDS model C-FH-4048 FIXED HEIGHT TRANSPORTER WITH CAROUSEL model C-FC-40 INDUSTRIAL/COMMERCIAL CARTS & DOLLIES



model MFM-4000

Cast Aluminum Dollies

These are easy to use and provide efficient moving time. Box-like frames have integral sides and deeply fluted tops. Dollies include 31/2" diameter x 3" wide phenolic rollers. They are excellent for moving heavy crates and machinery. Note: Except when used individually, corners should be turned by lifting the load and rotating each dolly individually. Overall height 4¼".

DECK SIZE (W x L)	UNIFORM STATIC Capacity	NUMBER OF ROLLERS	NET WT. (POUND)
41⁄2" x 41⁄2"	1,500 lb.	1	5
4¾" x 8½"	3,000 lb.	2	8
81⁄2" x 81⁄2"	6,000 lb.	4	15
81⁄2" x 121⁄2"	9,000 lb.	6	21
81⁄2" x 121⁄2"	3,000 lb.	6	22
	(W x L) 4½" x 4½" 4¾" x 8½" 8½" x 8½" 8½" x 12½"	(W x L) CAPACITY 4½" x 4½" 1,500 lb. 4¾" x 8½" 3,000 lb. 8½" x 8½" 6,000 lb. 8½" x 12½" 9,000 lb.	(W x L) CAPACITY OF ROLLERS $4\frac{1}{2}$ " x $4\frac{1}{2}$ " 1,500 lb. 1 $4\frac{3}{4}$ " x $8\frac{1}{2}$ " 3,000 lb. 2 $8\frac{1}{2}$ " x $8\frac{1}{2}$ " 6,000 lb. 4 $8\frac{1}{2}$ " x $12\frac{1}{2}$ " 9,000 lb. 6

Furniture and Crate Movers

Machinery Lifts

Transport furniture, crates, and machinery easily. Simply slide nose plate under item to be moved, strap both dollies together, and lift. Available in either a manual mechanical hand crank lift option or a manual hand pump hydraulic lift option. Standard with four (4) 6" x 2" swivel poly-on-steel casters and 190" long straps. Steel construction with durable paint finish. Priced and sold in pairs.

MODEL NUMBER	PLATE SIZE (W x D)	UNIFORM Capacity	LIFT HEIGHT	OVERALL SIZE (W x D x H)	NET WT. (POUND)
MECHANICAL L	IFT STYLE				
MFM-1300®	8¾" x 4¾"	1,300 lb.	15"	15½" x 22½" x 30¾"	77
HYDRAULIC LIFT STYLE					
MFM-4000®	23½" x 2¼"	4,000 lb.	10"	16½" x 26¾" x 42¼"	220

These machinery lifts are the ideal method to move bulky and hard to handle loads. Move large, awkward objects or heavy equipment that is difficult to maneuver or position like refrigerators, safes, furniture, or machines. Yet they are versatile enough to safely handle fragile, sensitive equipment like glass and computers. Lift height is 6" (model MFM-2-RAL has a 51/8" lift height). Optional side straps secure loads for stable moving. Large wheels allow smooth movement over bumps and cracks of factory floors. Forks are adjustable with mounting pegs to allow for positioning of forks to accommodate different width loads.





model MFM-2-RAL





MODEL NUMBER	FORKS Adjustable	FORK Length	UNIFORM Capacity	OVERALL SIZE (W x D x H)	NET WT. (Pound)
MFM-2-RAL	7¼" to 17½"	5"	2,000 lb.	22" x 12½" x 47½"	160
MFM-4-RAL	5" to 19½"	6"	4,000 lb.	23" x 16½" x 44"	325
MFM-6-RAL	6" to 19½"	6"	6,000 lb.	23" x 16¾" x 42½"	335
MFM-8-RAL	7¼" to 19½"	6"	8,000 lb.	23" x 17¼" x 45½"	400
MFM-10-RAL	9¼" to 19½"	6"	10,000 lb.	24" x 18" x 45½"	438
MFM-12-RAL	9¼" to 19½"	9¼" to 19½" 6" 12,000 lb. 24" x 18" x 45½"			
MFM-BELT-12	Belt	5			
MFM-BELT-16	Belt	5			
MFM-BELT-20	Belt	with triang	le hood ends	, 20 foot long	10

Machinery Skates

These skates are designed to move heavy equipment and machinery. Nylon wheels are strong and will not mark floors. The top of each skate includes a rubber surface for extra grip. Steel construction with handle to carry and position. Three styles to choose from.

Fixed: Dolly size is non-adjustable and wheels are rigid. Designed for moving in straight lines.

Adjustable: Includes two dollies connected with a slider bar to form one larger dolly. Slider bar allows for adjustable overall dolly width. Designed for moving in straight lines.

Steerable: Each dolly includes a swivel top plate and a pulling bar to allow for easy maneuvering around turns and corners.

MODEL NUMBER	ROLLER Material	NUMBER OF ROLLERS	OVERALL SIZE (W x D x H)	STATIC Capacity	NET WT. (POUND)
FIXED MACHIN	ERY SKATES				
FMS-2.5®	NYLON	2	10¾" x 4¾" x 4"	2.5 tons	10
FMS-3®	NYLON	4	15¾" x 8" x 3¾"	3 tons	22
FMS-6®	NYLON	6	16¼" x 8½" x 4"	6 tons	28
ADJUSTABLE M	ACHINERY SKAT	ES			
ASKT-6®	NYLON	8	12 ¹³ /16" x 10½" x 4 ³ /8"	6 tons	72
ASKT-12®	NYLON	12	16½" x 10½" x 4½"	12 tons	130
ASKT-24®	STEEL	16	19 ⁹ /16" x 11 ⁵ /16" x 4½"	24 tons	173
STEERABLE MA	CHINERY SKATE	S			
SSKT-3®	NYLON	4	11½" x 8½" x 47"	3 tons	32
SSKT-6®	NYLON	8	21" x 25" x 46"	6 tons	114
SSKT-12®	STEEL	8	21½" x 25" x 46"	12 tons	202





model SSKT-12

model SSKT-3

Steel Machine Rollers & Accessories

Made of high-strength annealed ductile iron, these Steel Machine Rollers have swivel tops that rotate 360° on chrome steel ball bearings to allow for easier turning. The rollers form a "tank track" to revolve around a center load bearing plate in the frame to provide maximum maneuverability. The weight of the load is transferred directly from the load bearing plate to the rollers, eliminating axle friction and requiring less power to start and move. A spring loaded locking mechanism on the swivel tops, except on model VHMS-2, can be engaged in detents at 45° intervals. These units are virtually maintenance free. Steering bars split in two and connect with sleeve for easy storage.

MACHINE ROLLERS

	-				
MODEL NUMBER	BODY SIZE (W x L)	OVERALL HEIGHT	UNIFORM STATIC Capacity	TYPE OF TOP	NET WT. (POUND)
VHMS-2®	3¼" x 8"	3½"	2,000 lb.	SWIVEL	11
VHMS-8®	51⁄2" x 10"	5"	8,000 lb.	SWIVEL	31
VHMS-15⊛	5¾" x 10½"	5"	15,000 lb.	SWIVEL	38
VHMS-30®	6½" x 12¾"	5"	30,000 lb.	SWIVEL	51

MACHINE ROLLER KIT

MODEL NUMBER	DESCRIPTION	NET WT. (POUND)
VHMS-2-KIT®	(4) VHMS-2 & (2)VHMH-36-1 STEERING BARS	61

MACHINE ROLLER HANDLES

MODEL NUMBER	DESCRIPTION	USE WITH	HANDLE	NET WT. (POUND)
				· · · ·
VHMH-36-1℗	STEERING BAR	VHMS-2	36"	10
VHMH-48-1®	STEERING BAR	VHMS-2	48"	12
VHMH-36-2®	STEERING BAR	VHMS-8/15/30	36"	15
VHMH-48-2®	STEERING BAR	VHMS-8/15/30	48"	17
VHMH-TB-2®	TURNING BAR	VHMS-8/15/30	36"	18





model MMJ-6 model MMJ-10



model LJ-17

model LJ-9-SS

Mechanical Machinery Jacks

Mechanical Machinery Jacks are good for repairing vehicles, lifting trucks, railway maintenance, construction, mining, and agriculture. Compact design with collapsible lever offers easy operation and simple maintenance. A self locking, anti-kickback operating lever reduces injuries. Standard features include: folding handle, two carrying handles and a large base plate. Lifting and lowering speed is controllable. No seals to leak. Will not drift down even after an extended period of time.

MODEL NUMBER	UNIFORM Capacity	LOWERED HEIGHT	RAISED HEIGHT	TRAVEL (INCHES)	FORCE REQUIRED To lift max. load	NET WT. (POUND)
MMJ-3®	1.5 tons	235/8"	357/16"	11 ¹³ /16"	63 lb.	33
MMJ-6®	3 tons	29"	42 ¹⁵ /16"	14"	79 lb.	48
MMJ-10⊛	5 tons	28¾"	42⁵/ 16"	13 ⁹ /16"	90 lb.	66

Leveling Jacks

Designed for permanent installation, these screw-style jacks hold platforms and other equipment in place and stabilize them at the required height. Drill a 11/4" diameter hole through the platform to be leveled and bolt the platform between the upper and lower flanges of the jack's divided housing. Uniform lifting capacity is 5,000 pounds with a holding capacity of 10,000 pounds. Jacks have an 8¹/₂" long handle that folds down when not in use. 37%" diameter swivel base has a slip-resistant rubber pad on the bottom (replacement pads available). Screw diameter is 11/4". Lift rate is 1/4" per crank revolution.

MODEL NUMBER	MINIMUM EXTENDED HEIGHT	MAXIMUM EXTENDED HEIGHT	OVERALL HEIGHT	SCREW TRAVEL	NET WT. (POUND)
STEEL CONSTRU	CTION WITH POLISHED	CHROME FINISH			
LJ-9®	41⁄2"	13½"	18"	9"	11
LJ-17®	41⁄2"	21½"	26"	17"	13
LJ-21®	41⁄2"	251⁄2"	30"	21"	14
STAINLESS STEE	L CONSTRUCTION				
LJ-9-SS	41⁄2"	13½"	18"	9"	11
LJ-17-SS	41⁄2"	21½"	26"	17"	13
LJ-21-SS	4½"	25½"	30"	21"	14

REPLACEMENT RUBBER BOTTOM PAD (FOR LJ-SS SERIES ONLY), MODEL LJ-PAD-SS



model FJB-36



Basement Floor Jacks

Provide extra support for leveling and stabilizing floor beams and joists during construction and repairs. Telescopic style with removable pins lets you properly position the brace for better leveling. End pad includes a screw and turning bar for easy height adjustment. Rugged all welded steel construction. Red oxide finish.

MODEL NUMBER	MINIMUM HEIGHT	MAXIMUM HEIGHT	MINIMUM HEIGHT Capacity	MAXIMUM HEIGHT Capacity	NET WT. (POUND)
FJB-16℗	12"	16"	9,738 lb.	9,738 lb.	9
FJB-36℗	19"	36"	9,738 lb.	6,863 lb.	11
FJB-100®	54"	100"	8,438 lb.	5,600 lb.	25
FJB-150®	54"	150"	11,200 lb.	2,588 lb.	36

Economical Floor Locks

Our economical floor locks help to stabilize mobile equipment during loading and unloading. They are perfect for keeping carts, trucks, work benches, and other portable equipment stationary. All of these floor locks are spring loaded and offer a non-skid rubber foot pad to keep equipment stationary. The heavy-duty steel construction has a bright zinc plated finish.

MODEL NUMBER	USE WITH Caster Height	EXTENDED HEIGHT	RETRACTED HEIGHT	TOP PLATE Dimensions	NET WT. (POUND)
FL-4 :	4"	57/8"	5"	4½" x 4"	5
FL-5℗	5"	6 ⁵ /8"	5 ⁵ /8"	4½" x 4"	5
FL-6℗	6"	7¾"	6¾"	4½" x 4"	5
FL-8®	8"	9 ¹³ / ₁₆ "	85/8"	4½" x 4"	5

J38

Adjustable Height Floor Locks

This one of a kind floor lock includes an adjustable height foot pad that will work on carts with different caster heights. The adjustable height feature provides uniform locking and safety unlocking force for better ergonomic operation. This feature also keeps the floor lock working properly as spring and pads wear over time. Height is adjustable by turning the bottom pad. The bottom pad includes suction-cups for extra grip.

MODEL NUMBER	EXTENDED HEIGHT	RETRACTED HEIGHT	USED WITH CASTER SIZE	NET WT. (POUND)
ZINC PLATED FINISH W	ITH HEAVY-DUTY CAST ST	TEEL CONSTRUCTION		
FL-ADJ-46®	5¾" to 8"	4¾" to 7"	4" - 6"	7
FL-ADJ-810⊛	7 ⁵ /8" to 10 ⁷ /8"	6¼" to 9½"	8" - 10"	9
STAINLESS STEEL CON	STRUCTION			
FL-ADJ-46-SS®	5¾" to 8"	4¾" to 7"	4" - 6"	7
FL-ADJ-810-SS®	7 ⁵ /8" to 10 ⁷ /8"	6¼" to 9½"	8" - 10"	9

Low Profile Floor Lock

The lowest-profile floor lock available on the market today. Features adjustable-height pad for precision and wear ability, simply bolt to bottom of cart. Foot operated. Zinc plated finish with heavy-duty cast steel construction.

MODEL	EXTENDED	RETRACTED	NET WT.	48 Hours
NUMBER	HEIGHT	HEIGHT	(POUND)	
FL-LK-LP®	4 ³ /8"	37/8"	6	egito Ship



48 Hours (-/) to Ship

Suction cup bottom pad

model FI -AD.I-46

General Purpose Floor Locks

Floor Locks may be used on platform trucks, fixture dollies, or equipment with casters. Simple foot pressure immobilizes equipment. Locks when large friction face is pressed against the floor. To release simply kick release rod. Brake is independent of casters and can be installed to any convenient location on the cart. Vertical mounting plate designed to mount to sides of carts and other portable products. The spring loaded pad accommodates uneven floors. Units mount with pad 11/2" off the floor when retracted.

MODEL NUMBER	MOUNTING HEIGHT	RETRACTED HEIGHT	USED WITH CASTER SIZE	NET WT. (POUND)
FL-LK-5E®	6 ⁵ /8"	5 ¹ /8"	5"	4
FL-LK-5X®	55/8"	4 ⁵ /8"	5"	9
FL-LK-7X®	7¼"	6¼"	6"	11
FL-LK-7G®	7¾"	6¼"	6"	11
FL-LK-10⊛	9 ¹⁵ / ₁₆ "	87/8"	8"	16
FL-LK-S [®]	7 ³ /8"	4 ¹ /8"	6"	6
FL-LK-SMR-L®	10¼" / 12¾"	15 ¹⁵ /16"	(2" of Travel)	7
FL-LK-SMR-R®	10¼" / 12¾"	15 ¹⁵ /16"	(2" of Travel)	7
STAINLESS STEEL CONSTR	UCTION			
FL-LK-SMR-SS-L	10¼" / 12¾"	15 ¹⁵ /16"	(2" of Travel)	7
FL-LK-SMR-SS-R	10¼" / 12¾"	15 ¹⁵ / ₁₆ "	(2" of Travel)	7



Polyurethane Floor Locks

Floor Locks are ideal for maintenance and construction facilities. The unit is designed to create a stable environment, while decreasing the chance of jostling or slight movement. The unit is constructed of steel with a thermoplastic polyurethane base. To use, place the unit close to a desired wheel or caster and raise until tension is built. Once secured, a simple locking device can be activated by applying pressure to the foot pedal.

MODEL NUMBER	RETRACTED HEIGHT	EXTENDED HEIGHT	USED WITH CASTER SIZE	NET WT. (POUND)
FL-LKH-4	4 ⁵ /8"	5 ³ /4"	4"	4
FL-LKH-5	57/16"	6 ⁵ /8"	5"	5
FL-LKH-6	67/16"	7 ⁵ /8"	6"	5
FL-LKH-8	9 ³ /8"	95/8"	8"	5
FL-LKL-3	35/8"	4 ¹ /4"	3"	2
FL-LKL-4	4 ¹ / ₂ "	51/4"	4"	2
FL-LKL-5	5 ¹ /2"	6 ¹ / ₄ "	5"	2

model FI -I KH-6

model FL-LKL-5