


## Full Product Line of Pallet Rack & Wire Deck Systems

Wireway Husky is the only RMI certified company to manufacture rack and wire deck together. Wireway Husky also provides technical and engineering support across an extensive product line that uses numerous punch styles and sizes to meet customer needs. As the originator and leader of the Guaranteed 48-Hour Quick Ship program, our customers have come to expect unparalleled service with quality product as standard.



### INVINCIBLE® RACK

The Wireway Husky line of Invincible pallet rack features brands synonymous with quality in the pallet rack industry for more than 45 years. Upright frames are available in both 3" x 1-5/8" and 3" x 3" posts with heights up to 46 Ft. The teardrop pattern is an industry standard and accepts most teardrop style beams. Beams feature the patented Bowlock® safety clip. Bowlock® cannot be sprung or removed without first removing the load and requires no special tools. Standard colors are green upright frames with orange beams. Call for other color options.



### INVINCIBLE® RACK

Most common in the rack industry. Two teardrop punches side by side on 2" centers. Beams adjustable every 2".

3" x 1-5/8"



3" x 1-5/8" Posts  
available in:  
14 gauge

3" x 3"



3" x 3" Posts  
available in:  
14 gauge  
13 gauge  
12 gauge  
11 gauge

# 48-HOUR Quick Ship GUARANTEED


**“From Order to Out the Door” 48-Hours or Less**

UPRIGHT FRAMES			
IU18: 3" X 1-5/8" X 14 GA			
D X H	Capacity	Model #	Lbs.
36 x 96	See IU18 Capacity Chart to Right	IU18360096	37.59
36 x 144		IU18360144	54.97
42 x 96		IU18420096	39.27
42 x 120		IU18420120	50.44
42 x 144		IU18420144	57.28
42 x 192		IU18420192	75.30
48 x 96		IU18480096	41.00
48 x 120		IU18480120	52.87
48 x 144		IU18480144	59.67
IU24: 3" X 3" X 14 GA			
42 x 144	See IU24 Capacity Chart to Right	IU24420144	72.14
42 x 192		IU24420192	95.17
42 x 240		IU24420240	118.20
48 x 192		IU24480192	98.18
SU29: 3" X 3" X 13 GA C/W 5" X 8" FP			
42 x 144	See Chart to Right	SU29420144	92.50
42 x 192		SU29420192	119.82

BEAMS			
H x L	CAP/PR	Model #	Lbs.
3.0 x 48	7,383	IBX30048	10.65
3.5 x 96	4,044	IBX35096	21.05
3.9 x 96	5,047	IBX39096	22.39
4.3 x 96	6,111	IBX43096	23.66
4.3 x 108	5,000	IBX43108	26.37
4.3 x 120	4,062	IBX43120	29.08
4.3 x 144	3,000	IBX43144	34.50
5.5 x 108	8,873	IBN55108	36.07
5.5 x 144	5,569	IBN55144	47.44
6.0 x 144	7,820	IBH60144	59.91

GALVANIZED WIRE DECKS			
Depth x Width	Capacity	Model #	Lbs.
36" x 46" x 3 channel	3,250	3646A3	18.58
36" x 52" x 3 channel	3,250	3652A3	20.09
36" x 58" x 4 channel	3,900	3658A4	23.83
42" x 46" x 3 channel	2,610	4246A3	21.40
42" x 52" x 3 channel	2,610	4252A3	23.11
42" x 58" x 4 channel	3,150	4258A4	27.48
48" x 46" x 3 channel	2,100	4846A3	24.61
48" x 52" x 3 channel	2,100	4852A3	26.57
48" x 58" x 4 channel	2,630	4858A4	31.61

UPRIGHT FRAME CAPACITY			
Beam Spacing	IU18	IU24	SU29
36	19,380	28,800	35,500
42	18,100	27,200	33,600
48	16,700	25,300	31,100
54	15,300	23,200	28,600
60	13,800	21,100	26,000
66	12,300	19,000	23,400
72	10,900	16,900	20,800
78	9,500	14,900	18,200
84	8,300	13,100	16,100
90	7,300	11,600	14,200
96	6,500	10,300	12,700



### Invincible®

The most common connection used in the rack industry today. Two 'teardrop' punches side-by-side going all the way up the upright on 2" centers making beams adjustable on the upright every 2". Standard colors are green uprights with orange beams.

WALL SPACERS		
Length	Model #	Lbs.
6"	WSIN06	0.87
8"	WSIN08	1.10
12"	WSIN12	1.55

CROSSBARS		
Depth	Model #	Lbs.
36"	A1036G	4.37
42"	A1042G	5.13
48"	A1048G	5.88

ROW SPACERS		
Length	Model #	Lbs.
6"	RSIN06	0.87
8"	RSIN08	1.10
12"	RSIN12	1.55

STANDARD POST PROTECTOR		
Height	Model #	Lbs.
12"	I5712-P	11.10

### GENERAL NOTES

1. Beam capacities are for uniformly distributed loads.
2. Beam capacities are based on a deflection specification of beam length/180 or on connector shear capacity, whichever is limiting.
3. Beams over 120" in length should be tied across the middle to prevent beam spread.
4. Beams over 90" that support loose decking should be tied across the middle to prevent beam spread.
5. Please call us for any beam spacing on an upright greater than 96".

1. Beam capacities are for uniformly distributed product loads. 2. Beam capacities are based on a deflection specification of beam length/180 or on connector shear capacity, whichever is limiting. 3. Beams over 120" in length should be tied across the middle to prevent beam spread. 4. Beams over 90" that support loose decking should be tied across the middle to prevent beam spread.

\* Exceptions to Guarantee: Delays due to acts of God, strikes, trucking service interruptions or international shipments. All orders are subject to credit department approvals. 48-Hour Quick Ship is based on order being received before 2:00 P.M. Eastern Standard Time. Call for pricing! Acknowledged QUICK SHIP orders not subject to price changes.



# Steel Folding Gates


Ventilation  
•  
Visibility  
•  
Access Control



Standard Pin Type Mount with "L" Bracket holds top of gate to wall



"L" Brackets allow gates to be installed on surface or recess. Extended brackets facilitate installing inside of overhead door tracks.

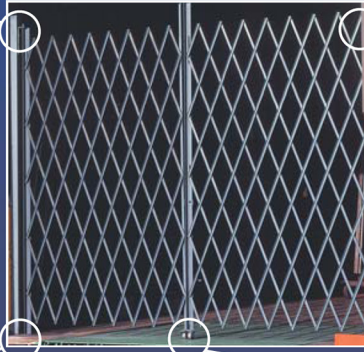

Bottom Mount is the lower pin inserted through a bearing washer into a 1/2" x 2" hole drilled into the floor



The Drop Pin slips into the same size hole and is secured by a gusset angle on opposite gate rail.

**SECURE**  
Receiving Doors  
•  
Lift-Up Door  
•  
Entranceways  
•  
Hallway

SINGLE GATE				DOUBLE GATE			
Wireway #	Height	Width	Weight	Wireway #	Height	Width	Weight
600650	5.0	5.5	49.28	620465	6.5	8.0	81.14
600665	6.5	5.5	60.35	620480	8.0	8.0	100.00
600670	7.0	5.5	65.59	620565	6.5	10.0	96.35
600680	8.0	5.5	73.54	620580	8.0	10.0	118.97
600765	6.5	6.5	64.15	620665	6.5	12.0	111.57
600770	7.0	6.5	69.60	620680	8.0	12.0	137.95
600780	8.0	6.5	78.29	620765	6.5	14.0	126.78
600865	6.5	7.5	67.96	620780	8.0	14.0	147.44
600870	7.0	7.5	73.76	620865	6.5	16.0	134.38
600880	8.0	7.5	83.03	620880	8.0	16.0	166.42



**Available in 48 hours Guaranteed**  
Information subject to change.